



Magnatag[®]
 Show What's Happening

PRODUCT CATALOG

Magnatag[®] Inc.
 2031 O'Neil Rd
 Macedon, NY 14502

Toll Free: (800) 624 4154
 Email: sales@magnatag.com
 Web: www.magnatag.com

 Manufactured in Macedon, NY

How do you show what's happening?

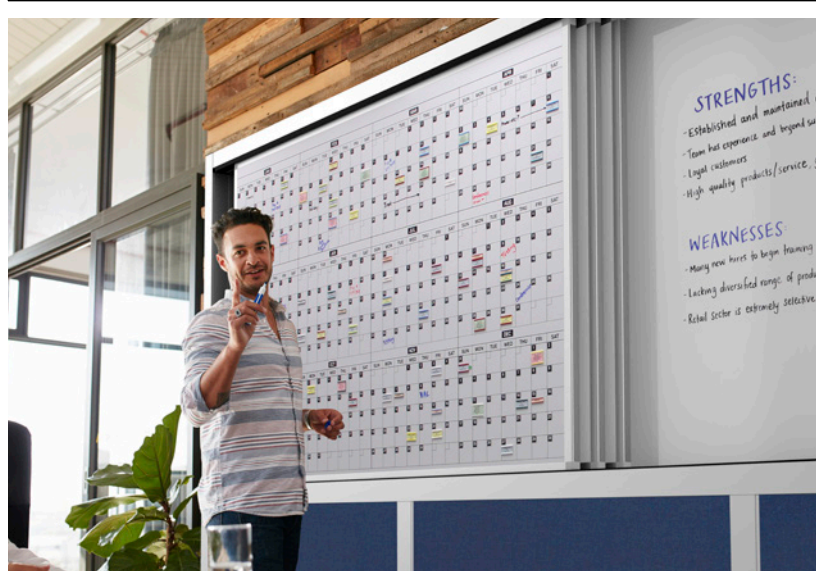



TABLE OF CONTENTS



04 WhiteWalls®

Magnetic Dry-Erase
Steel Wall Panels



10 VisuGlass®

Premium Magnetic
Glass Whiteboards



12 VisuGlass® WhiteWalls®

Premium Magnetic Glass
Whiteboard Walls



14 The Skyscraper®

Glass Whiteboard
Bulletin Tower



16 PlanView®

Visual Control
Center



24 TrackWall®

Sliding Panel
FullWall® System



32 MagnaLux®

Framed Magnetic
Dry-Erase Whiteboards



36 Roll-Around™

Magnetic Whiteboard
Stands



38 RotoCube®

Rotating Magnetic
Bulletin Towers

MAYFIELD PROJECT


AWARENESS ► CONSIDERATION ► CONVERSION ► LOYALTY



CAMPAIGN FORECAST/PROJECTIONS

	ROI	Leads	Launch
Mayfield TV	4.297	1,746	03/12/23
Mayfield Social	1.917.☺	838	02/10/23
Mayfield SEM	3.447	1,214	02/08/23
Mayfield D. Response	2.5%	1,004.☺	02/16/23

Q1 Budget



MODELS



Unlimited creativity starts with a blank slate

WhiteWalls®

Magnetic Whiteboard
Steel Wall Panels

"Almost invisible"
flat seams



Easy Install

WhiteWalls® Magnetic Dry-Erase Steel Wall Paneling

Turn your room or wall into a creative hot-spot.

Why Use WhiteWalls®?

1 WhiteWalls® turn your room or wall into a creative hot-spot. They are perfect for conference, break, and team meeting rooms, executive or home office walls, and even busy hallways. Use them wherever you meet to plan, develop, brainstorm or create.

2 WhiteWalls® give you an **uninterrupted** magnetic dry-erase steel writing surface with **nearly invisible flat seams** and have a **frameless finished-edge design**. Order WhiteWalls® in plain-white or heat-fused printed with 1" or 2" Ghost-Grid™.

3 WhiteWalls® provide the vital avenue your team needs to **show what's happening, see the big picture, and work through complex problems**. They give you and your team an **unlimited blank slate** that encourages original ideas and **fosters out-of-the-box solutions**.




You wouldn't believe how much creativity is sparked when you have the entire room as your writing surface. We've covered practically every wall with these whiteboard wall panels. Now each design team can have their own working area and not have to worry about running out of space.


—Office Manager, Label Manufacturer, Brea CA



CALL US (800) 624-4154



CUSTOM FIT WHITEWALLS®

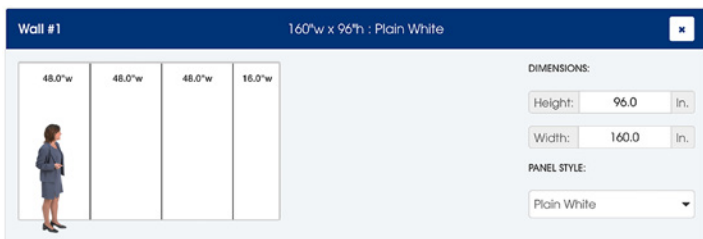

Our custom fit panel option is ideal for customers that want wall-to-wall magnetic whiteboards. To order custom fit panels simply visit our website at whitewalls.com and type in the height and width of your walls. Custom fit panels can be ordered in half inch increments. The width of your walls will be divided by 48 inch panels and the remainder will be split up into one or two end panels.



PROJECT ONTO WHITEWALLS®




Using a **short throw projector** will give you a clear picture while eliminating the reflections and other interference you might find when using a standard projector.

Consider ordering a custom panel that is slightly less in height to account for the space required to mount your projector. Each panel is factory-formed to fit perfectly when matched with another.



GHOST-GRID™ PRINTED STYLES




Ghost-Grids™ are White-on-White™ heat-fuse printed into the steel whiteboard surface.



WhiteWalls® Magnetic Dry-Erase Wall Panels

FRAMELESS SELF-EDGED DESIGN

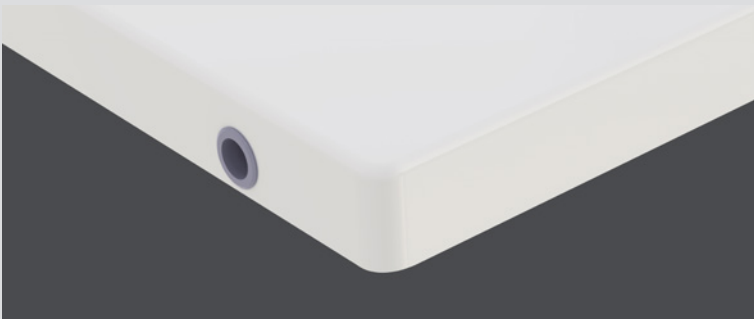

Self-edge finished on 4-sides for a "clean white canvas" look

Tight fitting flat seams you can write over
"almost invisible"



DRY-ERASE

Porcelain-like MagnaLux® steel whiteboard writing surface

MAGNETIC

Panels are made of steel, making for a fantastic durable magnetic surface.

Each panel is formed to fit perfectly when matched with another panel.

1. Features

- WhiteWalls® are built with strong, stress-skin porcelain-like steel, precision-formed on all four sides to produce a frameless, self-edged magnetic whiteboard.
- Sandwich construction features tension-leveled 24 gauge magnetic steel with proprietary Magnalux® white dry-erase surface, ½ inch cellulose fiber core and embossed aluminum back.
- Complete details, including BIM files, spec sheets, and more at whitewalls.com

2. Benefits

- Attractive, self-edged panel design assembles to create a smooth wall with an almost invisible seam between panels
- No 'T' moldings or edge trim required
- Easy install micro adjustment hanging brackets
- Custom, heat-fused printing available
- WhiteWalls® are built to stay like new for a lifetime of daily use

3. Accessories Available

- Show color-coded ID and status information with a wide range of extra-strong WakTack® magnets, PreciseLine® tapes, and dry-erase supplies.
- See the full array of adhesive and magnetic cardholders, letter/number sets, and document display options at: magnatag.com/magnets-accessories



Sizes

Fifteen standard panel sizes ranging from 48x48" to 118x48". Custom sizes available on our website. Panels are 1/2" thick.


Standard panel dimensions (in inches):

- 48 x 48
- 60 x 48
- 66 x 48
- 70 x 48
- 72 x 48
- 78 x 48
- 84 x 48
- 90 x 48
- 94 x 48
- 96 x 48
- 98 x 48
- 102 x 48
- 108 x 48
- 114 x 48
- 118 x 48
- Custom Sizes

Options


- Available in 3 styles (Plain White, 1" Ghost-Grid™, 2" Ghost-Grid™)
- Panels are available in both vertical and horizontal orientation
- Individual panels can be sized up to 118" tall and 48" wide

PANEL OPTIONS

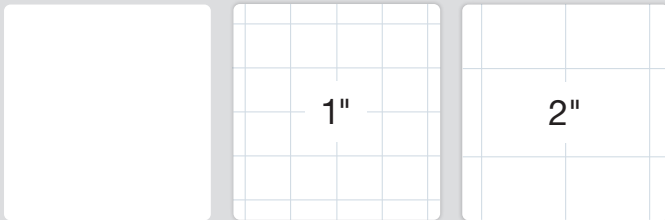

3 Styles (Plain White, 1" Ghost-Grid™, 2" Ghost-Grid™)

INTERNAL CONSTRUCTION

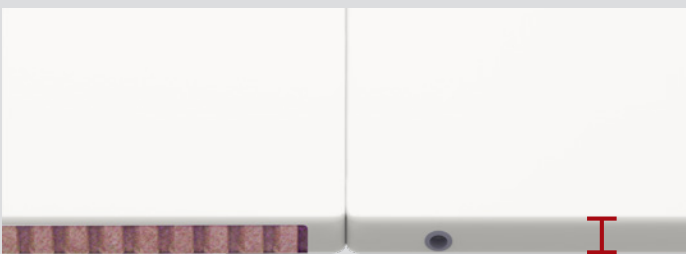


Super strong, stress skin, honeycomb core construction

Frameless, fully finished-edge design

Panels are 1/2" thick

Embossed Aluminum Backer



Technical Data

Applicable Standards

American Society for Testing and Materials (ASTM)

ASTM E84—Standard for Surface Burning Characteristics of Building Materials:
Flame Spread 5, Smoke Developed Index 25

Weight

- Weight per square foot = 1.35 lbs
- 96" x 48" panel weighs 43 lbs


Limitations

- Not recommended for outdoor use



EASY TO INSTALL (see page 9)



MICRO ADJUSTMENT HANGING BRACKETS

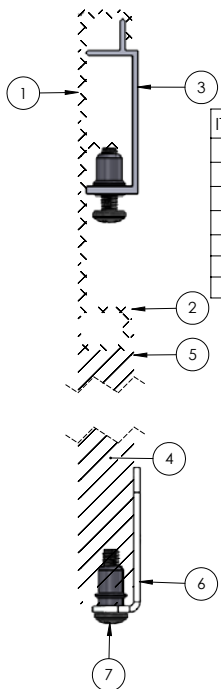

ITEM NO.	DESCRIPTION	QTY.
1	MagnaLux® Whiteboard Steel	1
2	Mounting Bracket	1
3	Micro-adjusting Hanger Clip	2
4	Honeycomb Core	1
5	Embossed Aluminum Backer	1
6	Anchor Bracket	1
7	Button Head Screw	4

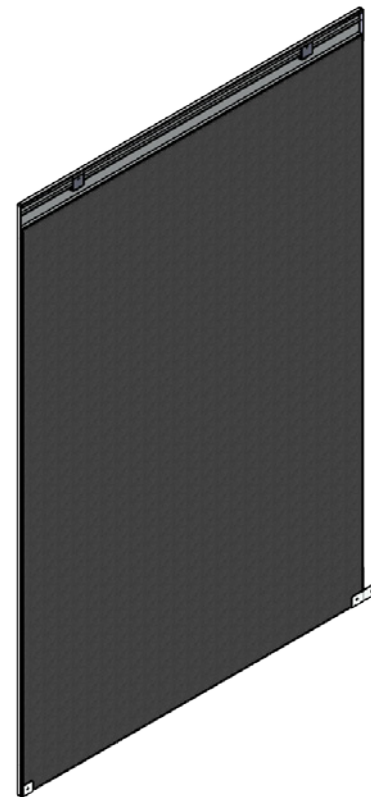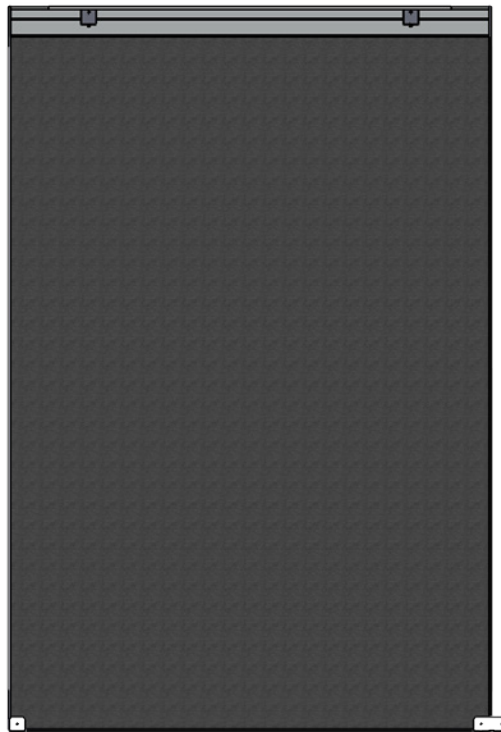

Easy-to-Install

Create a Perfectly Level Writing Surface

Walls are not always flat. Most walls require micro adjustments to make sure that your panels match perfectly and sit flat. Our micro adjustment hanging brackets are easy to install and easy to use. With just a simple twist of a screw, you can raise and lower each corner of the board to make sure it matches perfectly with the next panel. For bowed or concave walls, simply loosen the screw and slip the necessary number of shims behind the bracket.

Preparatory Work

WhiteWalls® are installed with basic hand tools and a level. Contact Magnatag® for detailed instructions or visit whitewalls.com

Maintenance Instructions

Care and cleaning instructions are available from the manufacturer or magnatag.com/faq

Availability and Cost

Availability

Available directly from Magnatag® Inc, WhiteWalls® are made to order and made to order and most ship in 7-10 business days or less. Large projects may take longer—call for lead times.

Cost

Visit whitewalls.com or contact Magnatag® directly for a quote.

Warranty

When properly installed and maintained, Magnatag® WhiteWalls® are warranted for one year. Custom size or printed panels may not be returned for any reason.

Filing Systems

Additional product information is available from the manufacturer upon request.

INSTALLATION INSTRUCTIONS

1. Wall Measurement

- Measure the distance (A) from the floor to desired bottom edge of your WhiteWalls® panel. Add panel height (B) and *subtract* 1/2 inch. Mark wall at this height. (Fig. 1)

$$A'' + B'' - 1/2'' = H$$

- Using a level, mark the wall at the marked height in step 1a, along the full width of the WhiteWalls® (Fig. 2)
- Mark locations of wall studs along the full width of the intended WhiteWalls® mounting area. (Fig. 2)




Fig. 1

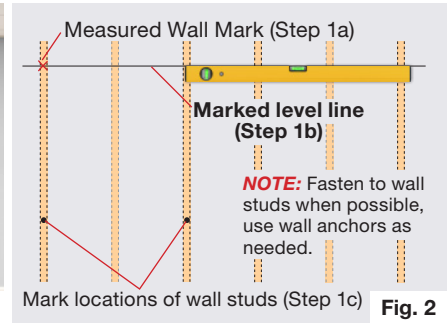


Fig. 2

⚠ Note: Minimum 1" clearance needed from panel top to ceiling.

2. Wall Brackets: Assembly and Wall Fastening

- **Assembly:** Insert a Leveling Screw into each Micro Adjustment Hanging Bracket until it is flush with the rivet nut. Then, insert the Hanging Bracket into the Panel Bracket and spin the Leveling Screw until it makes contact with the middle lip of the Panel Bracket. (Fig. 3)
- Using Hardware appropriate for your wall type (not included), fasten the Micro Adjustment Hanging Brackets at stud locations which provide the greatest support to the panels. **Align bracket "shoulder" with the drawn level lines** (Fig. 4).

Wall Bracket Assembly




Fig. 3

Wall Fastening




Fig. 4

3. Installing Multi-Panel WhiteWall® Systems

- **Attach Seam Anchor Brackets to WhiteWall® Panels**—Insert a Phillips Screw through the left panel slot of the Seam Anchor Bracket and into the threaded insert on the bottom **right corner** edge of all panels in the WhiteWall® assembly, **except** the right-end panel (Fig. 5). **Fasten snugly. Do not over-tighten.**
- **Install Left End Panel**—Raise the left end panel so that the panel bracket is just above the wall brackets installed in step 2b (Fig 6). Slide the panel to the desired left edge of the WhiteWall® assembly (Fig. 7).
- **Fasten Seam Anchor Bracket to Wall**—Fasten the Seam Anchor Bracket to the wall using hardware appropriate for your wall type (not included) (Fig 8). Fasten to a wall stud if possible or use wall anchors as needed.
- **Install Remaining Panels**—Slide panels to adjoin each previous panel and fasten its Anchor Bracket to the wall. Connect all panels by fastening Phillips Screws through the right panel slot of the Anchor Brackets (Fig. 9).

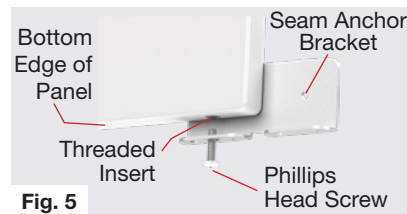


Fig. 5




Fig. 6




Fig. 7




Fig. 8

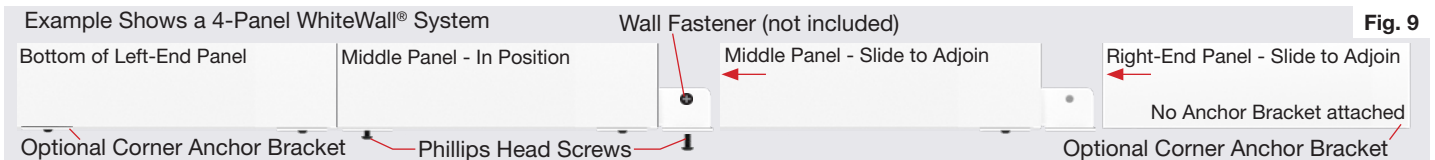


Fig. 9

4. Panel Adjustments: Level & Flush (If Needed)

- If panels are out of level, remove affected panels and spin the Leveler Screws of the Wall Brackets to compensate, see chart in Fig. 10. If panels are not flush near the tops, use the U Shims as shown in Fig 11 to pad them out.

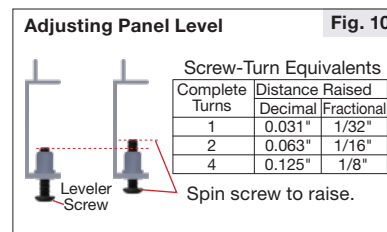


Fig. 10


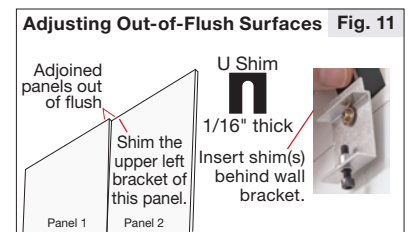


Fig. 11



VisuGlass® Premium Magnetic Glass Whiteboards

THE VISUGLASS® DIFFERENCE

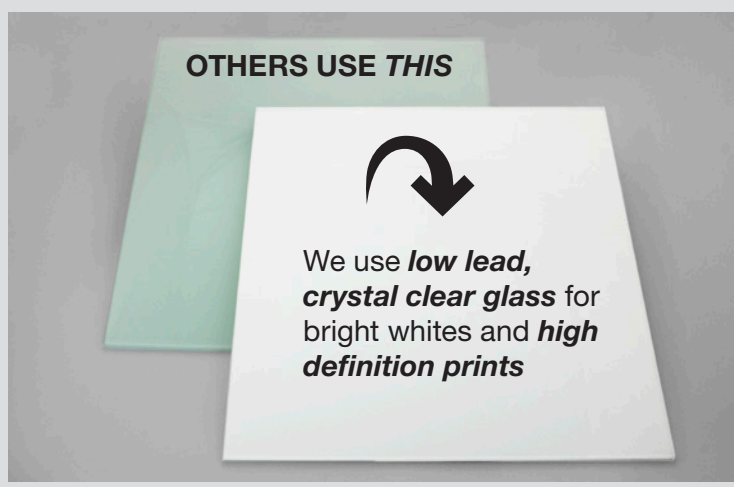

FRAMED & FRAMELESS OPTION



All of our glass boards are 1/4 thick, with an elegant, polished beveled edge and aluminum substructure for rigidity.

1. Features & Benefits

Vivid Writing Surface.

- Our optically clear low-lead glass is tempered at extremely high temperatures to ensure our boards retain their bright white color after years of use without staining, fading or cracking.

No sag design.

- Most glass boards are flexible and bow in the middle making it awkward to write on them. VisuGlass® has a unique construction and rigid structural hanging system to keep them flat and easy to write on.

Permanent Pen & Eraser Holder.

- Every VisuGlass® board is available with your choice of either a visible or hidden marker and eraser dock.





Simple and Secure Installation.

- The steel backer and hidden frame system ensures that VisuGlass® will install quickly and securely without additional reinforcement or ugly mounting hardware.

Worry-Free Shipping.

- Rugged tempered glass and custom glass packaging mean no worries about shipping and delivery.

Made in the USA.

- Manufactured and shipped from our factory in Macedon, NY.
- Complete details at magnatag.com/VIG

2. Additional Options

5 Anodized Frame Colors

- Etched Polished Brass
- Etched Polished Copper
- Etched Polished Gunmetal
- Etched Polished Blue Pewter
- Etched Polished Stainless

Color Options

- Glass boards are statement pieces. We have 12 standard color options to choose from.

Printed Systems

- We are now offering some of our most useful systems in glass. Our proprietary GlassGrip® accessories and high definition printed floating glass boards are statement pieces and will help show your team what's happening
- Visit magnatag.com/glass-whiteboards for more information

3. Board Size (h x w) & Approximate Weight

Horizontal Boards

- 2 x 3' | 31 lbs
- 3 x 4' | 54 lbs
- 4 x 4' | 74 lbs
- 4' x 5' | 88 lbs
- 4 x 6' | 100 lbs
- 4 x 8' | 127 lbs

Vertical Boards

- 3 x 2' | 31 lbs
- 4 x 3' | 54 lbs
- 5' x 4' | 88 lbs
- 6' x 4' | 100 lbs
- 8' x 4' | 127 lbs

4. Technical Data

- VisuGlass® is an ultra-clear soda-lime float glass with high visible light transmittance (>91% at 6mm) and a brilliant azure edge.
- Our quarter inch tempered glass is incredibly durable and can withstand an impact of 6,000 psi.
- Conforms to ASTM C 1036, 1048 and ANSI 97.1 specifications
- Complete details, including BIM files, spec sheets, and more at magnatag.com/glass-whiteboards

5. Sustainability

We manufacture all of our VisuGlass® markerboards using premium architectural glass that complies with CPSC 16 CFR 1201 standards

Other sustainability initiatives and programs include:

- Type III Environmental Product
- Cradle to Cradle Certified™ Bronze
- LEED® and Living Building Challenge documentation
- Material Ingredient Disclosure and Safety Data Sheets



VisuGlass® WhiteWalls® Magnetic Glass Whiteboard Walls

MICRO ADJUSTMENT STANDOFF MOUNTING BRACKETS



ELEGANT HIDDEN MARKER & ERASER TRAY



1. Features & Benefits

All the advantages of regular glass boards.

- No ghosting or staining
- Will not fade over time
- Works with a variety of markers
- No scrubbing, carefree easy-to-clean maintenance

Permanent Pen & Eraser Holder.

- No flimsy add-on marker and eraser holder—elegant hidden marker & eraser tray.

No green tint, no cloudy look.

- VisuGlass® shows marker colors noticeably better than other writing surfaces.

Simple and Secure Installation.

- The steel backer and hidden frame system ensures VisuGlass® WhiteWalls® will install quickly and securely without additional reinforcement or damage to your wall surface.

No Visible Mounting Hardware.

- VisuGlass® WhiteWalls® feature hidden full width aluminum panel brackets that connect to 1" standoff wall brackets. Each standoff bracket uses adjustable leveler screws and U-shims to raise and lower each corner of the board and perfectly align panels to create a smooth, uninterrupted writing surface and account for uneven and concave walls.



2. Additional Options

Color Options

- Glass boards are statement pieces— 12 standard color options to choose from.

Custom Printed Glass WhiteWalls®

- Our magnetic print glass whiteboard walls can accommodate any design in full color at hi-resolution. We can print your diagram, map, artwork pattern, or graphs across multiple panels.

3. Accessories

- A full array of GlassGrip® glass board accessories including card holders, letter & number sets, NeoTack™ magnets, symbols, color blocks, etc. can be found at:

magnatag.com/glass-board-supplies

4. Easy-Installation

- Walls are not always flat. Most walls require micro-adjustments to make sure that your panels match perfectly and sit flat. Our micro-adjustment brackets are easy to install and easy to use. With just a simple twist of a screw, you can raise and lower each corner of the board to make sure it matches perfectly with the next panel. For bowed or concave walls, simply loosen the screw and slip the necessary number of shims behind the bracket.
- Installation instructions can be found on magnatag.com/WWG

5. Size (h x w) & Approximate Weight


- | | |
|--------------------|---------------------|
| ■ 2' x 3' 31 lbs | ■ 4' x 6' 100 lbs |
| ■ 3' x 2' 31 lbs | ■ 4' x 8' 127 lbs |
| ■ 3' x 4' 54 lbs | ■ 5' x 4' 88 lbs |
| ■ 4' x 3' 54 lbs | ■ 6' x 4' 100 lbs |
| ■ 4' x 4' 74 lbs | ■ 8' x 4' 127 lbs |
| ■ 4' x 5' 88 lbs | |





The Skyscraper® Glass Whiteboard Bulletin Tower

THE VISUGLASS® DIFFERENCE

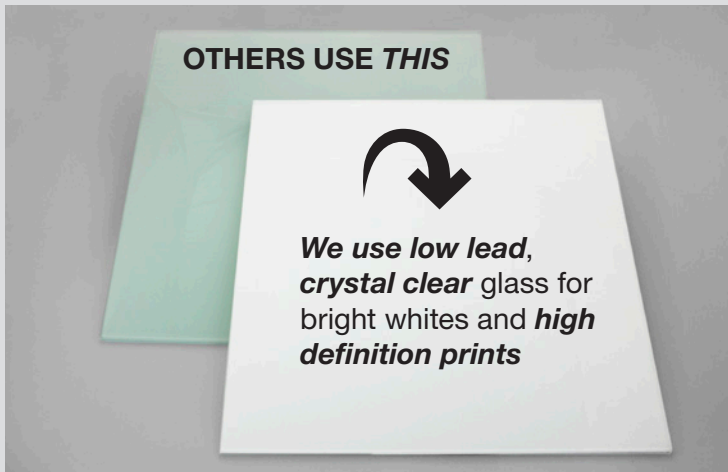

1. Features & Benefits

Vivid Writing Surface.

- Optically clear low lead tempered glass with a bright white coloring makes your words and sketches seem to come alive as you write on the tower.

All the advantages of regular glass boards.

- No ghosting or staining
- Will not fade over time
- Works with a variety of markers
- No scrubbing, carefree easy-to-clean maintenance

Display space larger than a 4x8' wall board

- Combined 34 square feet of usable display space

Magnetic Glass Panels

- All of the glass panels are magnetic and work with our NeoTack™ neodymium rare-earth magnets and GlassGrip® accessories.

Marquee Headings

- Every Skyscraper® comes with 4 transparent marquee heading templates and precision-cut adhesive vinyl letter sets.

Beautiful German Beechwood

- German Beechwood is a very strong, hard and durable close-grain hardwood, making it the ideal choice for high use applications.



Innovative Pen & Eraser Holder

The Skyscraper® pens are placed at a 45° angle into the corner of the tower for convenience. They will not move when rotating the tower. The eraser has a magnetic docking location on the surface of the left panel.

Worry Free Shipping

- Your Skyscraper® will arrive packed tightly on a pallet. This product is heavy, with a weight of 182 lbs.

Made in the USA.

- Manufactured and shipped from our factory in Macedon, NY.
- Complete details at magnatag.com/SKY


2. Accessories

- The Skyscraper® features an innovative pen holder drilled into the corner of the tower at 45°. This ensures that your markers will not move while rotating the tower. The eraser has a magnetic docking location on the surface of the left panel.
- A full array of GlassGrip® glass board accessories including card holders, letter & number sets, NeoTack™ magnets, symbols, color blocks, etc. can be found at:

magnatag.com/glass-board-supplies


3. Optional Add-Ons

- The Skyscraper® can be purchased with optional black or white leveling threaded-stem casters. Rotating the stem counter-clockwise will lower the leveling pad into a stationary position. To re-engage the wheel, simply rotate clockwise to lift the leveling pad off the ground.



Black or White Leveling Threaded-Stem Casters

Rotating the orange stem counter-clockwise will lower the leveling pad on the Skyscraper® and lock the unit into place. To re-engage the wheel, simply rotate clockwise to lift the leveling pad off the ground.

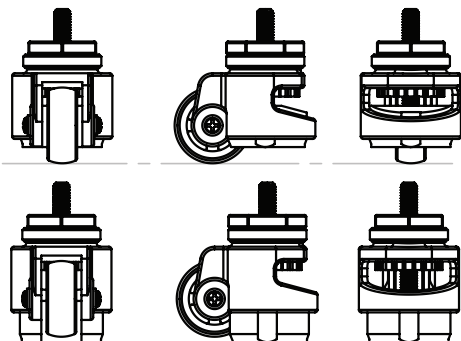

Lowers Wheel



Lowers Leveling-Pad

4. Technical Data


- The Skyscraper® features ultra-clear soda-lime float glass with high visible light transmittance (>91% at 6mm) and a brilliant azure edge.
- Our 3/16" tempered glass panels are incredibly durable and can withstand an impact of 6,000 psi.
- Conforms to ASTM C 1036, 1048 and ANSI 97.1 specifications

5. Sustainability

We manufacture the Skyscraper® using premium architectural glass that complies with CPSC 16 CFR 1201 standards.

Other sustainability initiatives and programs include:

- Type III Environmental Product
- Cradle to Cradle Certified™ Bronze
- LEED® and Living Building Challenge documentation
- Material Ingredient Disclosure and Safety Data Sheets

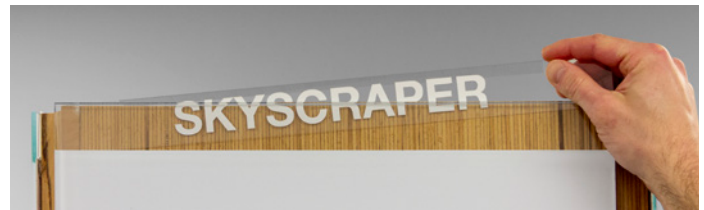

Marquee Headings

Easy-To-Install Simply apply your message and slip it behind the glass. Templates are designed to fit perfectly behind the header of each glass panel.

PlanView®

Visual Control Centers




Panels slide in and out of view exposing 4 or more panels at one time. Cabinets are available with 3, 6, 8, or 10 tracks, up to 25 feet wide.

*Choose from **hundreds of slide-panel options** including whiteboards, charts, calendars, maps and bulletins.*

Easy to assemble and weight-bearing on the floor, no walls required.

PlanView® condenses a whole roomful of magnetic whiteboards into a single multi-track command center.

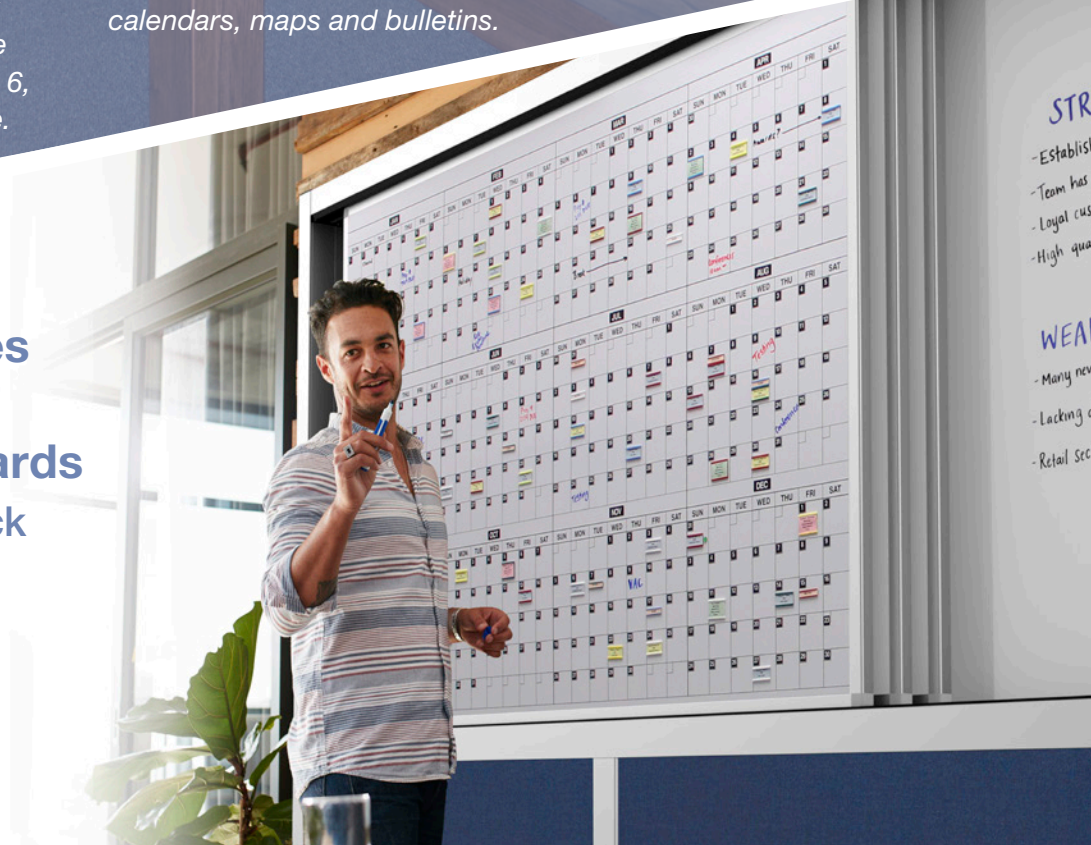

Why PlanView®?

PlanView® creates a place where you and members of your organization can gather to plan, schedule, communicate and engage with each other. It brings together information from separate areas and creates a place to gather and understand the big picture. Simply slide panels into view when needed and back out of sight when finished.

PlanView® panels slide into view when needed and back out of sight when finished.

Standard PlanView® cabinets are 80" tall with widths to over 25 feet.

Standard panels are 3 or 4 feet high, with widths from 2 to 6 feet.

The satin aluminum track cabinet has a full width PandaLux® write-on magnetic back panel.

PlanView® systems allow you to view 2, 3, 4 or more SlidePanels® at a time.

PlanView® cabinets come with 3, 6, 8 or 10 SlideTracks™.

PlanView® panels are easily removed and resequenced or hung separately on a wall.

Systems include fabric base panels in 6 colors to match your decor.

PlanView® is weight-bearing on the floor. The cabinet supports itself on adjustable feet and attaches to the wall for stability.

Your PlanView® Visual Control Center

With a PlanView® System, your schedules, plans and visual presentations are literally "at your fingertips". Just slide a panel into view when needed and back out of sight when finished.

You can lift the lightweight sliding panels out and reinsert them on any track for re-sequencing as needed. You can also work on them at your desk, carry them to a meeting and then organize them in your PlanView® cabinet for sequential presentation.

Choose from printed or plain magnetic dry-erase whiteboards, CorkTack™, FabricTack™ and MapMount® panels or any of the planning and scheduling systems you see on our website.


Standard panels are 3 or 4 feet high, with widths from 2 to 6 feet. PlanView® cabinets come with 3, 6, 8 or 10 SlideTracks® and allow you to view 2, 3, 4 or more SlidePanels at a time.

The satin aluminum track cabinet has a full width PandaLux® write-on-white magnetic back panel. The system also includes fabric base panels in 6 colors to match your decor.


PlanView® is weight-bearing on the floor. The cabinet supports itself on adjustable feet and attaches to the wall for stability. PlanView® is fast and easy to install, only requiring 2 workers with a screwdriver, a portable drill (for wall anchors), a framing square and a carpenter's level, taking about 2-3 hours of installation for most systems.

Order online or contact one of our experienced design specialists to help you select the right PlanView® for your requirement. Please email us at sales@magnatag.com or call 800 624 4154 (8-6, M-F, Eastern Time).

We ship most PlanView® units in 7 business days or less. Individual PlanView® sliding board panels, when ordered separately, ship in 3 business days. Although it seldom occurs, we will notify you if your PlanView® cabinet order requires more shipping time due to extra large or complex custom board construction or assembly design.

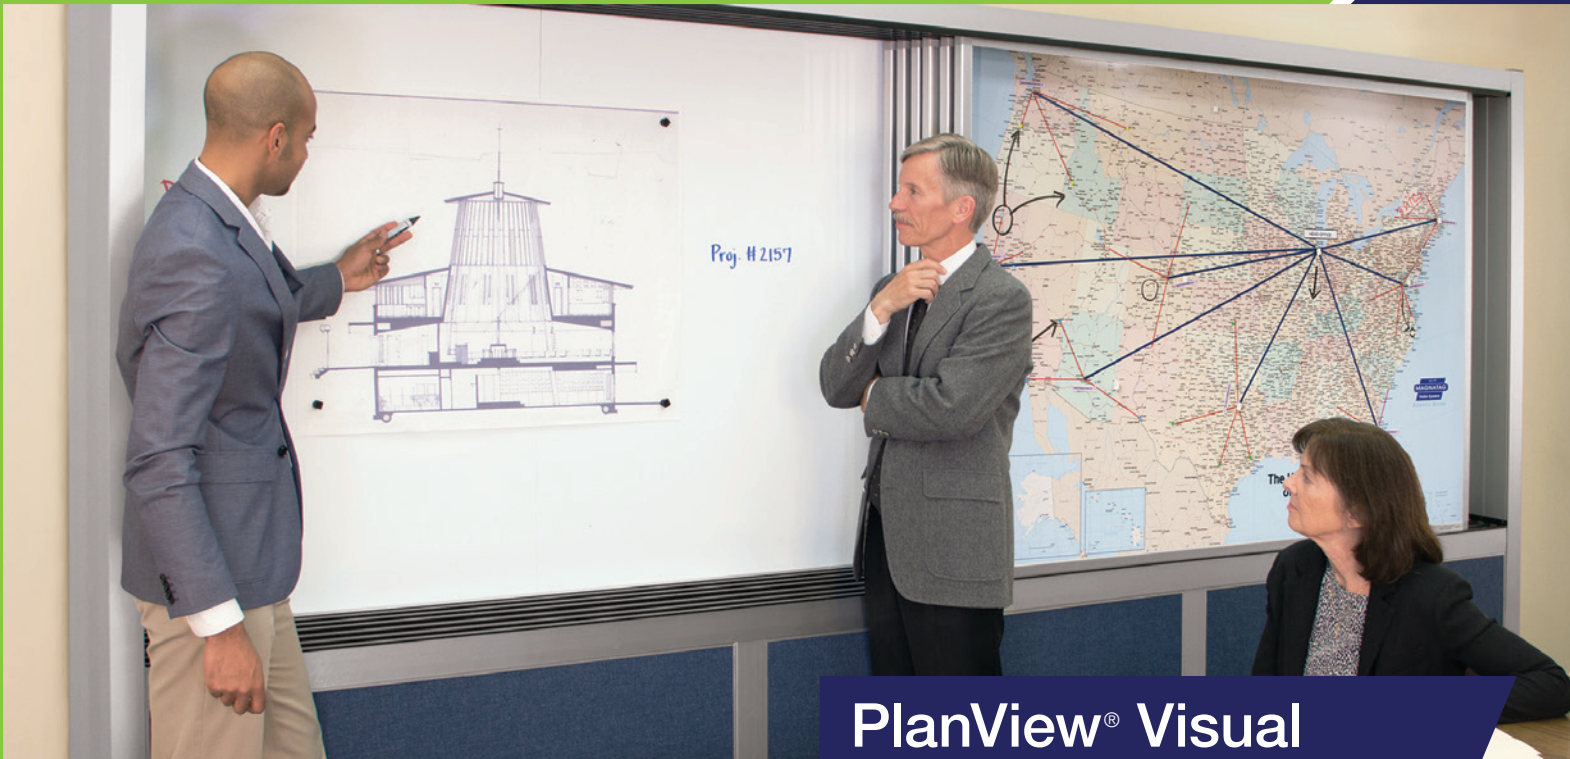

PlanView® Visual Control Center

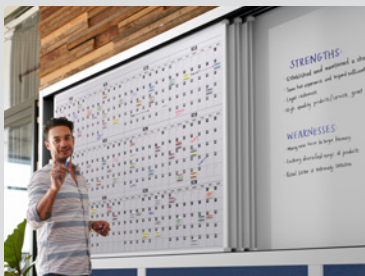

View 2, 3, or 4 SlidePanels™ at a time.



Cabinets are available with 3, 6, 8, or 10 SlidePanels™.



Panels easily slide in and out of view.



Panels are easily removed and resequenced.



Cabinet includes a full width MagnaLux® dry-erase magnetic back panel.



PlanView® is weight-bearing on the floor and anchors to the wall for stability.

1. Features

- 80" tall
- Full-width MagnaLux® dry-erase back panel
- PlanView® is weight bearing on the floor and anchors to wall for stability.
- Interchangeable panels for quick installation and sequencing
- Satin Anodized 6060 T-5 Tempered Aluminum Frame
- Complete details, including BIM files, spec sheets, and more at magnatag.com/PV

2. Options

- Available with 3, 6, 8, or 10 tracks
- Designer fabric base panel options (Blue, Green, Gray, Sand, Claret, Black)
- 5 panel sizes
- 15 standard panels

3. Benefits

- Panels slide into view when needed and back out of sight when finished
- Ideal where space is limited or where it is pertinent to display certain information while keeping other panels concealed
- Fast and easy to install, requiring just two workers with minimal tools and 2-3 hours for most systems

STANDARD CABINET SIZES

Available in 3, 6, 8, and 10 tracks. Cabinet height is 80" tall. Cabinet depth will vary based on number of tracks chosen.


View 2 Panels		View 3 Panels		View 4 Panels		Cabinet Depth	
Panel Size	Width	Panel Size	Width	Panel Size	Width	# Tracks	Depth
-	-	3' x 2'	89"	3' x 2'	117"	3	8 ½"
3' x 4'	109"	3' x 4'	161"	3' x 4'	213"	6	14 ½"
4' x 3'	85"	4' x 3'	125"	4' x 3'	165"	8	17 ½"
4' x 4'	109"	4' x 4'	161"	4' x 4'	213"	10	20 ½"
4' x 6'	157"	4' x 6'	233"	4' x 6'	309"		

All options viewable at magnatag.com/PV


- All PlanView® cabinets can be built with 3, 6, 8, or 10 SlideTracks™. View 2, 3, or 4 SlidePanels™ at a time based on the width of the cabinet. Custom width units to fit your space are also available. Contact one of our experienced design specialists to help you select the right PlanView® for your requirements. Please email us at sales@magnatag.com or call 800-624-4154.

PLANVIEW® PANEL OPTIONS


Choose from 15 standard SlidePanels™ or design your own board with our custom print option.




Plain White




Calendar Panel



1" Square Grid™



1" Square Ghost-Grid™

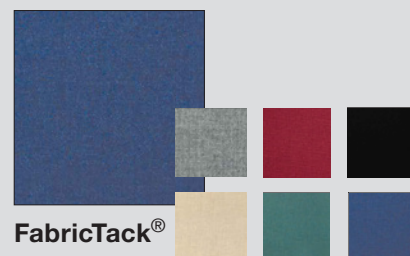


FabricTack® (6 colors)


Gray, Claret, Black, Sand, Green, Blue



ShadeLine® Rows




1¼" Rows



Isometric Grid



Map-Mount®




CorkTack™

SLIDETRACKS™


Available with 3, 6, 8, or 10 SlideTracks™




3 Tracks



6 Tracks




8 Tracks



10 Tracks

X-SECTION: 3-TRACK CABINET

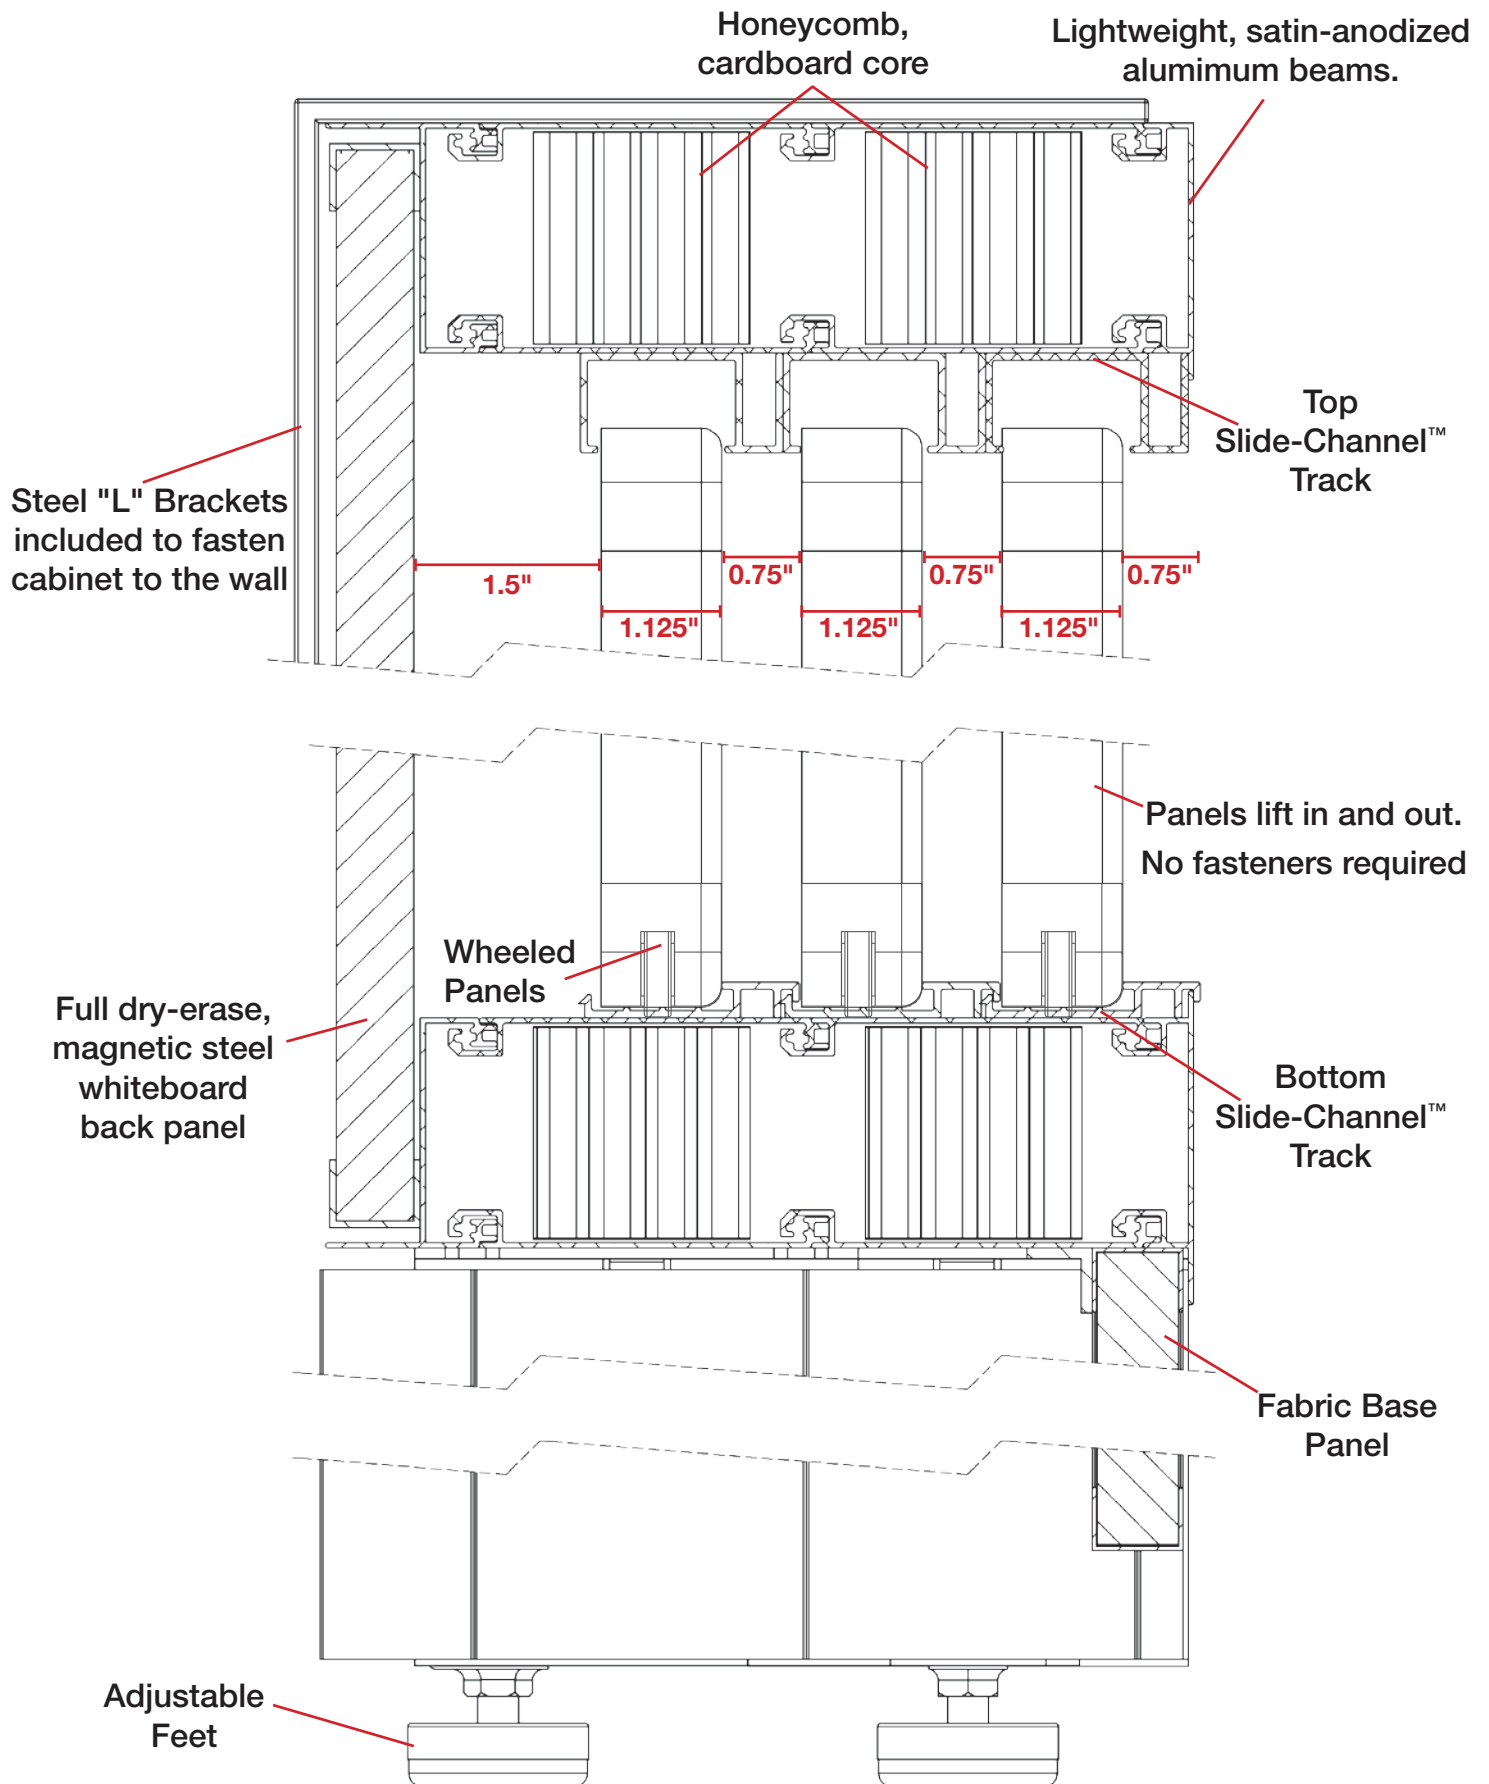

INSTALLATION INSTRUCTIONS (10 Easy-to-Follow Steps)

IMPORTANT: Assemble PlanView® cabinet face down on the floor near installation location.



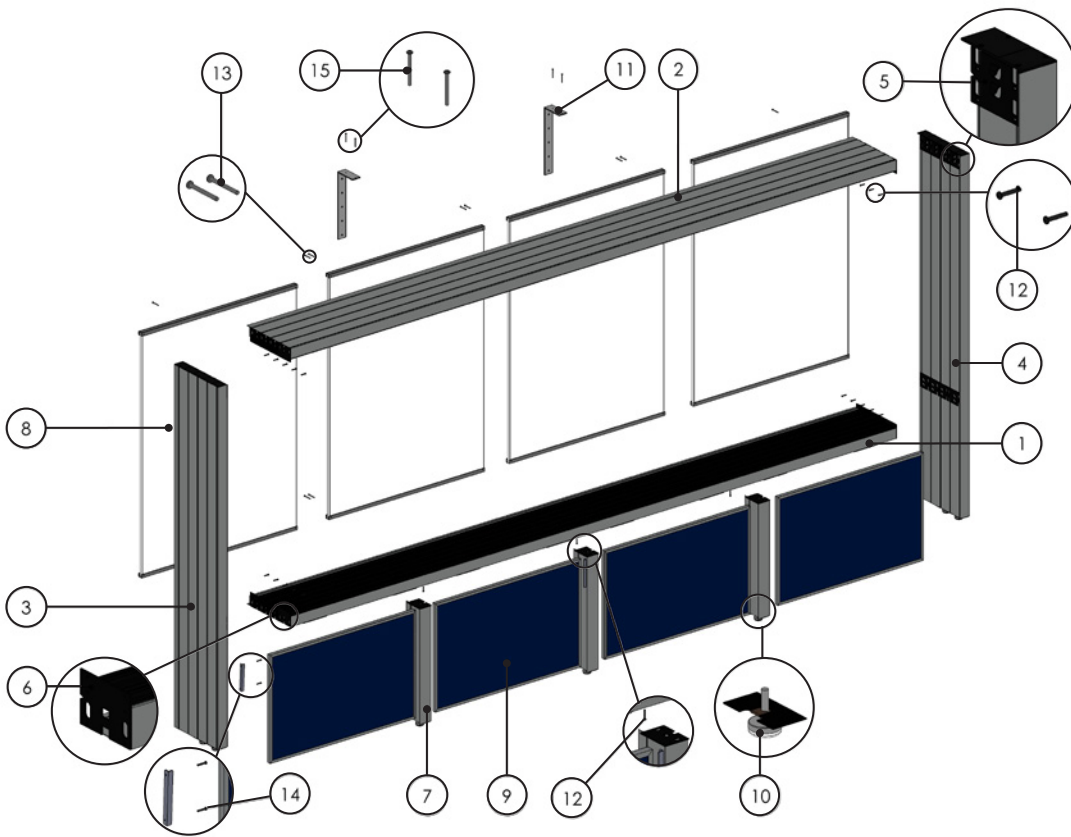


Diagram #	Part Description
1	Lower Crossmember
2	Upper Crossmember
3	Left Upright
4	Right Upright
5	Upright Endplate
6	Crossmember Endplate
7	Sub Leg(s)
8	Back Panels
9	Fabric Kick Panels
10	Adjustable Feet
11	Wall Mounts / "L" Brackets
12	#8- 1" Black Panhead Screw
13	#8- 1¼" Silver Panhead Screw
14	#8- 1/2" Silver Panhead Screw
15	#8- 1" Silver Panhead Screw




STEP 1

- Attach upper crossmember* (2) to the uprights (3, 4) by sliding the upright endplates (5) over the crossmember endplates (6) as shown in figure. Note: The upper crossmember has the deeper black SlidePanel™ tracks.




STEP 2

- Attach lower crossmember (1) to the uprights (3, 4) by engaging the endplates as described above. Check each corner of the assembly with a framing square to ensure proper alignment.




STEP 3

- Once squared, fasten the #8 1" black panhead screws (12) through the crossmember endplates (6) and into the upright endplates (5) for all four corners of the cabinet frame.

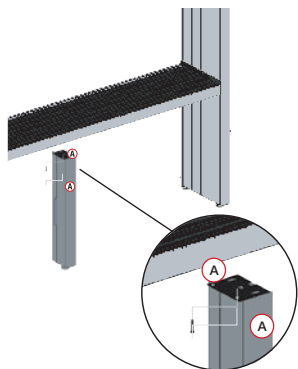




STEP 4

- Attach the sub-legs (7) to the lower crossmember (1), engaging the endplates as with the cabinet frame. Match the number(s) on the sub-leg(s) with the corresponding number(s) on the crossmember.
- Use the #8 - 1" black panhead screws (12) to fasten the endplate brackets on the sub-legs.

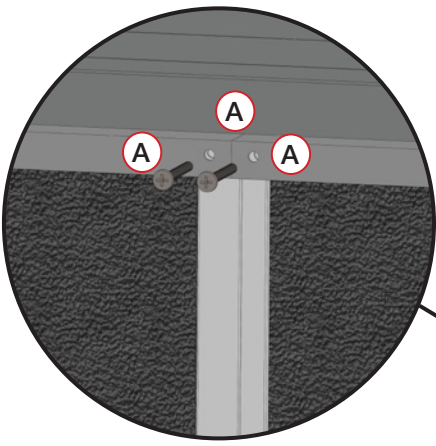


STEP 5

- Install the back panels (8), whiteboard side down, matching the numbers on the panels to the numbers on the cabinet frame.
- Use the #8 – 1-3/4" silver panhead screws (13) to fasten the back panels to the cabinet framing.

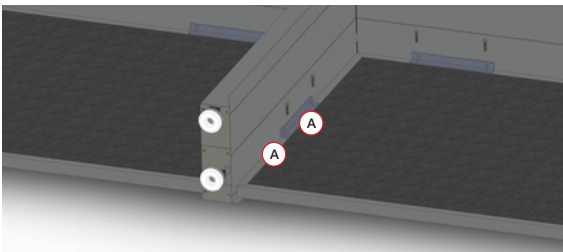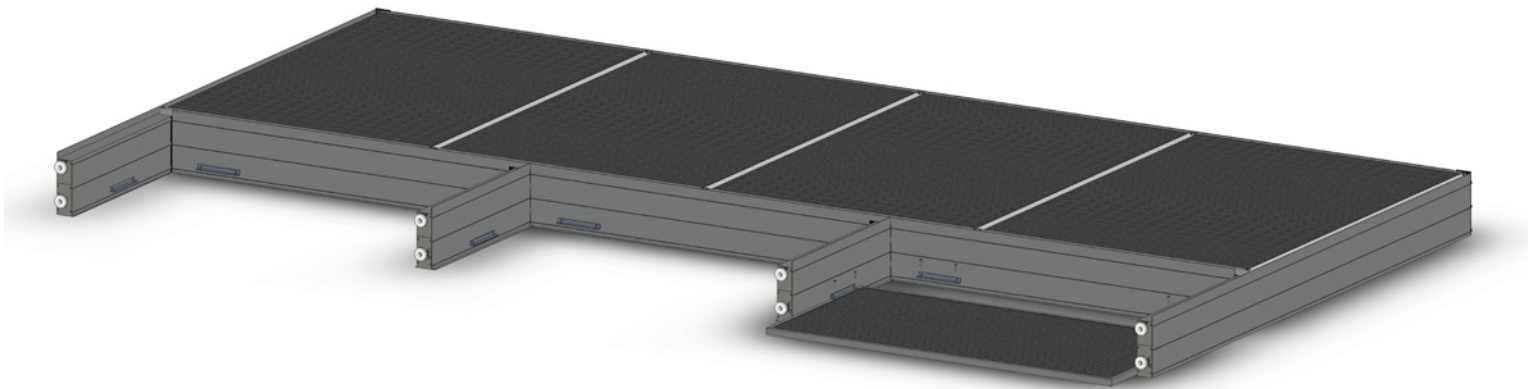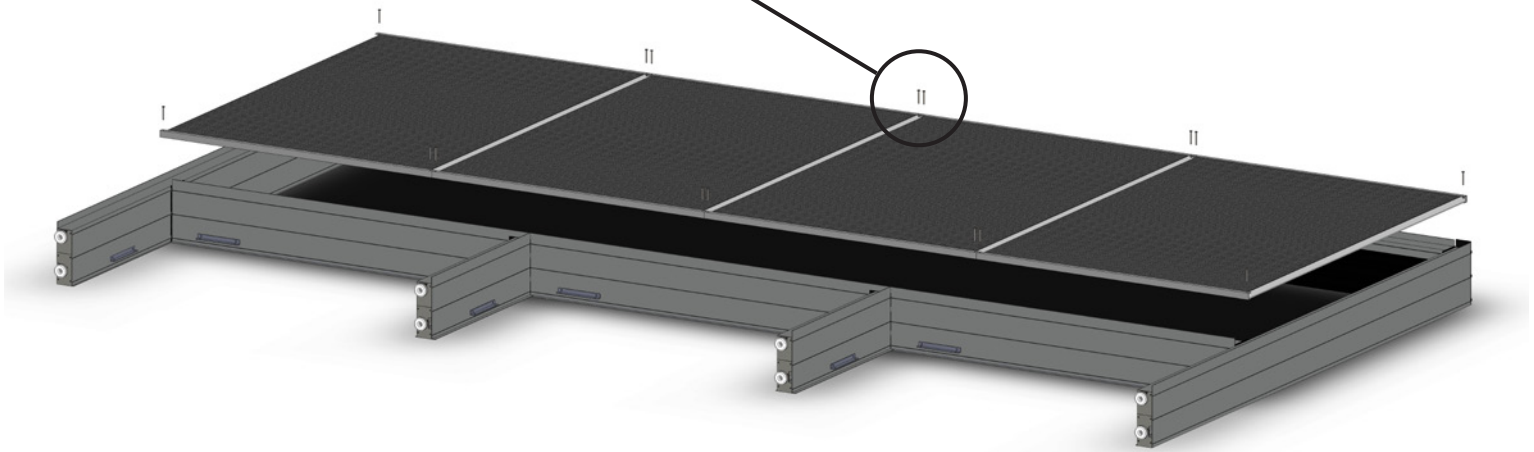

STEP 6

- Install the Fabric Kick Panels (9), fabric side down, matching the numbers on the kick panels to the numbers on the sub-legs.
- Use the #8 – 1/2" silver panhead screws (14) to fasten the fabric kick panels to the cabinet framing.

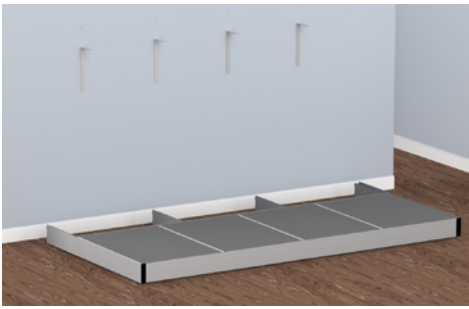

STEP 7

- With the help of others, lift the assembled PlanView® and place in position against the wall. Level it by adjusting the feet (10) at the bottom of the cabinet.
- Slide the wall mount "L" brackets (11) over and behind the upper crossmember (2) between the cabinet and the wall. Space the brackets at wall stud locations if possible. Mark the spacing and height of the wall brackets. 32 inch spacing is recommended.
- BE SURE THAT THE UPPER CROSSMEMBER IS LEVEL ALONG THE ENTIRE LENGTH OF THE CABINET BEFORE MARKING BRACKET LOCATIONS. This will ensure smooth panel sliding.




STEP 8

- With the help of others, carefully move the PlanView® cabinet aside to fasten the wall "L" brackets (11). Fasten the brackets to the wall using hardware (not included) appropriate for your wall type and into wall studs if possible.



STEP 9

- With the help of others, re-position the PlanView® cabinet under the installed wall mount "L" brackets. Drill holes through the bracket holes into the upper crossmember (2) and fasten using the #8 - 1" Silver Panhead Screws (15).

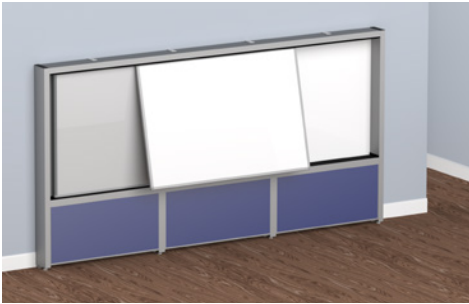

STEP 10

- Load your PlanView® SlidePanels™ into the cabinet by inserting the top edge of the panel into the desired upper track at similar angle shown left. Pivot the panel into the cabinet so that the bottom edge of the panel is above the corresponding bottom track and let the panel seat downward into the bottom track. The panel should slide easily in the cabinet left to right. Repeat for the other SlidePanels™.

The PlanView® Cabinet is now ready for use.



TrackWall®

Sliding Panel FullWall® System

TrackWall® condenses a whole roomful of magnetic whiteboards into a single multi-track command center.



Whiteboards slide easily in and out of view.



View up to 5 whiteboards, 20 whiteboard capacity.



Choose from 21 standard whiteboards.



Perfect for rooms where people gather to create and review plans, schedules, results, and opportunities.




Why TrackWall®?

TrackWall® creates a place where you and members of your organization can gather to plan, schedule, communicate and engage with each other. It brings together information from separate areas and creates a place to meet and understand the big picture. Simply slide panels into view when needed and back out of sight when finished.




TrackWall® systems allow you to **view 2, 3, 4 or 5 SlidePanels™ at a time.**



TrackWall® cabinets come with **3, 6, 8 or 10 SlideTracks™**. Cabinets are 97 ½" tall and reach up to 265" in width.



TrackWall® panels **slide into view when needed** and back out of sight when finished.



TrackWall® panels **are easily removed and resequenced** or hung separately on a wall.



The satin aluminum track cabinet has a **full width MagnaLux® dry erase magnetic back panel.**



TrackWall® is easy to assemble. It is **load-bearing on the floor** and anchors to the wall for support.



Your TrackWall® FullWall® System

With a TrackWall® System, your schedules, plans and visual presentations are literally "at your fingertips". Just slide a panel into view when needed and back out of sight when finished. You can lift the lightweight sliding panels out and reinsert them on any track for re-sequencing as necessary. TrackWall® is ideal where space is limited, or where you only want to display certain information while keeping other panels concealed.

Choose from printed or plain magnetic dry erase whiteboards, CorkTack™, FabricTack®, TackFree®, and MapMount® panels. Standard panels are 97 ½" tall by 49 ½" wide. TrackWall® cabinets come with 3, 6, 8 or 10 SlideTracks™ that allow you to view 2, 3, 4 or 5 SlidePanels™ at a time. The satin aluminum track cabinet also has a full width MagnaLux® dry erase magnetic panel.

TrackWall® is load-bearing on the floor and anchors to the wall for support. Leveler glide feet adjust for uneven floors. TrackWall® is fast and easy to install, requiring just two workers with a screwdriver, a portable drill (for wall anchors), a framing square and a carpenter's level. Installation will take approximately 3 to 4 hours for most systems.

Order online or contact one of our experienced design specialists to help you select the right TrackWall® for your requirement. Please email us at sales@magnatag.com or call 800 624 4154 (8-6, M-F, Eastern Time).

We ship most TrackWall® units in 7-10 business days. Individual TrackWall® sliding board panels, when ordered separately, ship in 3 business days. Although it rarely occurs, we will notify you if your TrackWall® cabinet order requires additional time for delivery.



TrackWall® Sliding Panel FullWall® System

1. Features

- Magnalux® Porcelain-Like Steel Markerboards
- Full width MagnaLux® dry-erase magnetic back panel
- TrackWall® is load bearing on the floor and anchors to the wall for support
- Interchangeable panels for quick installation and sequencing
- Satin Anodized 6060 T-5 Tempered Aluminum Frame
- Maximum Width Available: 265" | Height: 97-1/2"
- Complete details, including BIM files, spec sheets, and more at magnatag.com/TWA

2. Options

- 21 Standard SlidePanels™ or custom print option
- Ghost-Grid™ and ShadeLine® dry-erase panels
- View 2, 3, 4, or 5 SlidePanels™ at a time
- Available with 3, 6, 8, or 10 SlideTracks™

3. Benefits

- Panels slide into view when needed and back out of sight when finished
- Ideal where space is limited or where it is pertinent to display certain information while keeping other panels concealed
- Fast and easy to install—requiring just two workers with minimal tools and 3-4 hours for most systems



View 2, 3, 4, or 5 SlidePanels™ at a time.



Cabinets are available with 3, 6, 8, or 10 SlidePanels™.



Whiteboards easily slide in and out of view.



Panels are easily removed and resequenced.



Cabinet includes a full width MagnaLux® dry-erase magnetic back panel.



TrackWall® sits on the floor and anchors to wall for support.

STANDARD CABINET SIZES

Available in 3, 6, 8, and 10 tracks*. Cabinet height is 97 1/2" tall.
Standard Cabinet Panels are 91" h x 49 1/2" w.

# Tracks	Depth of Unit	Panels in View	Width of Unit
3	8-1/2"	2	109"
6	14-1/2"	3	161"
8	17-1/2"	4	213"
10	20-1/2"	5	265"

*View all combinations at magnatag.com/TWA

- All TrackWall® cabinets can be built with 3, 6, 8, or 10 SlideTracks™. View 2, 3, 4, or 5 SlidePanels™ at a time based on the width of the cabinet. Custom width units to fit your space are also available. Contact one of our experienced design specialists to help you select the right TrackWall® for your requirements. Please email us at sales@magnatag.com or call 800-624-4154.

TRACKWALL® PANEL OPTIONS


Choose from 21 standard SlidePanels™ or design your own board with our custom print option.




Plain White



ShadeLine®
Rows




1 1/4" Rows




1 1/4" Ghost
Rows




1" Square
Ghost-Grid™



1" Square
Grid™




Map-Mount®




6 1/2"
Columns



TackFree®
Blue



TackFree®
Gray




TrackFree®
Claret




TackFree®
Black



TackFree®
Tan



TrackFree®
Green




CorkTack™




FabricTack®
Blue




FabricTack®
Gray




FabricTack®
Claret



FabricTack®
Black




FabricTack®
Tan




FabricTack®
Green

SLIDETRACKS™


Available with 3, 6, 8, or 10 SlideTracks™



3 Tracks



6 Tracks




8 Tracks



10 Tracks

X-SECTION: 3-TRACK CABINET

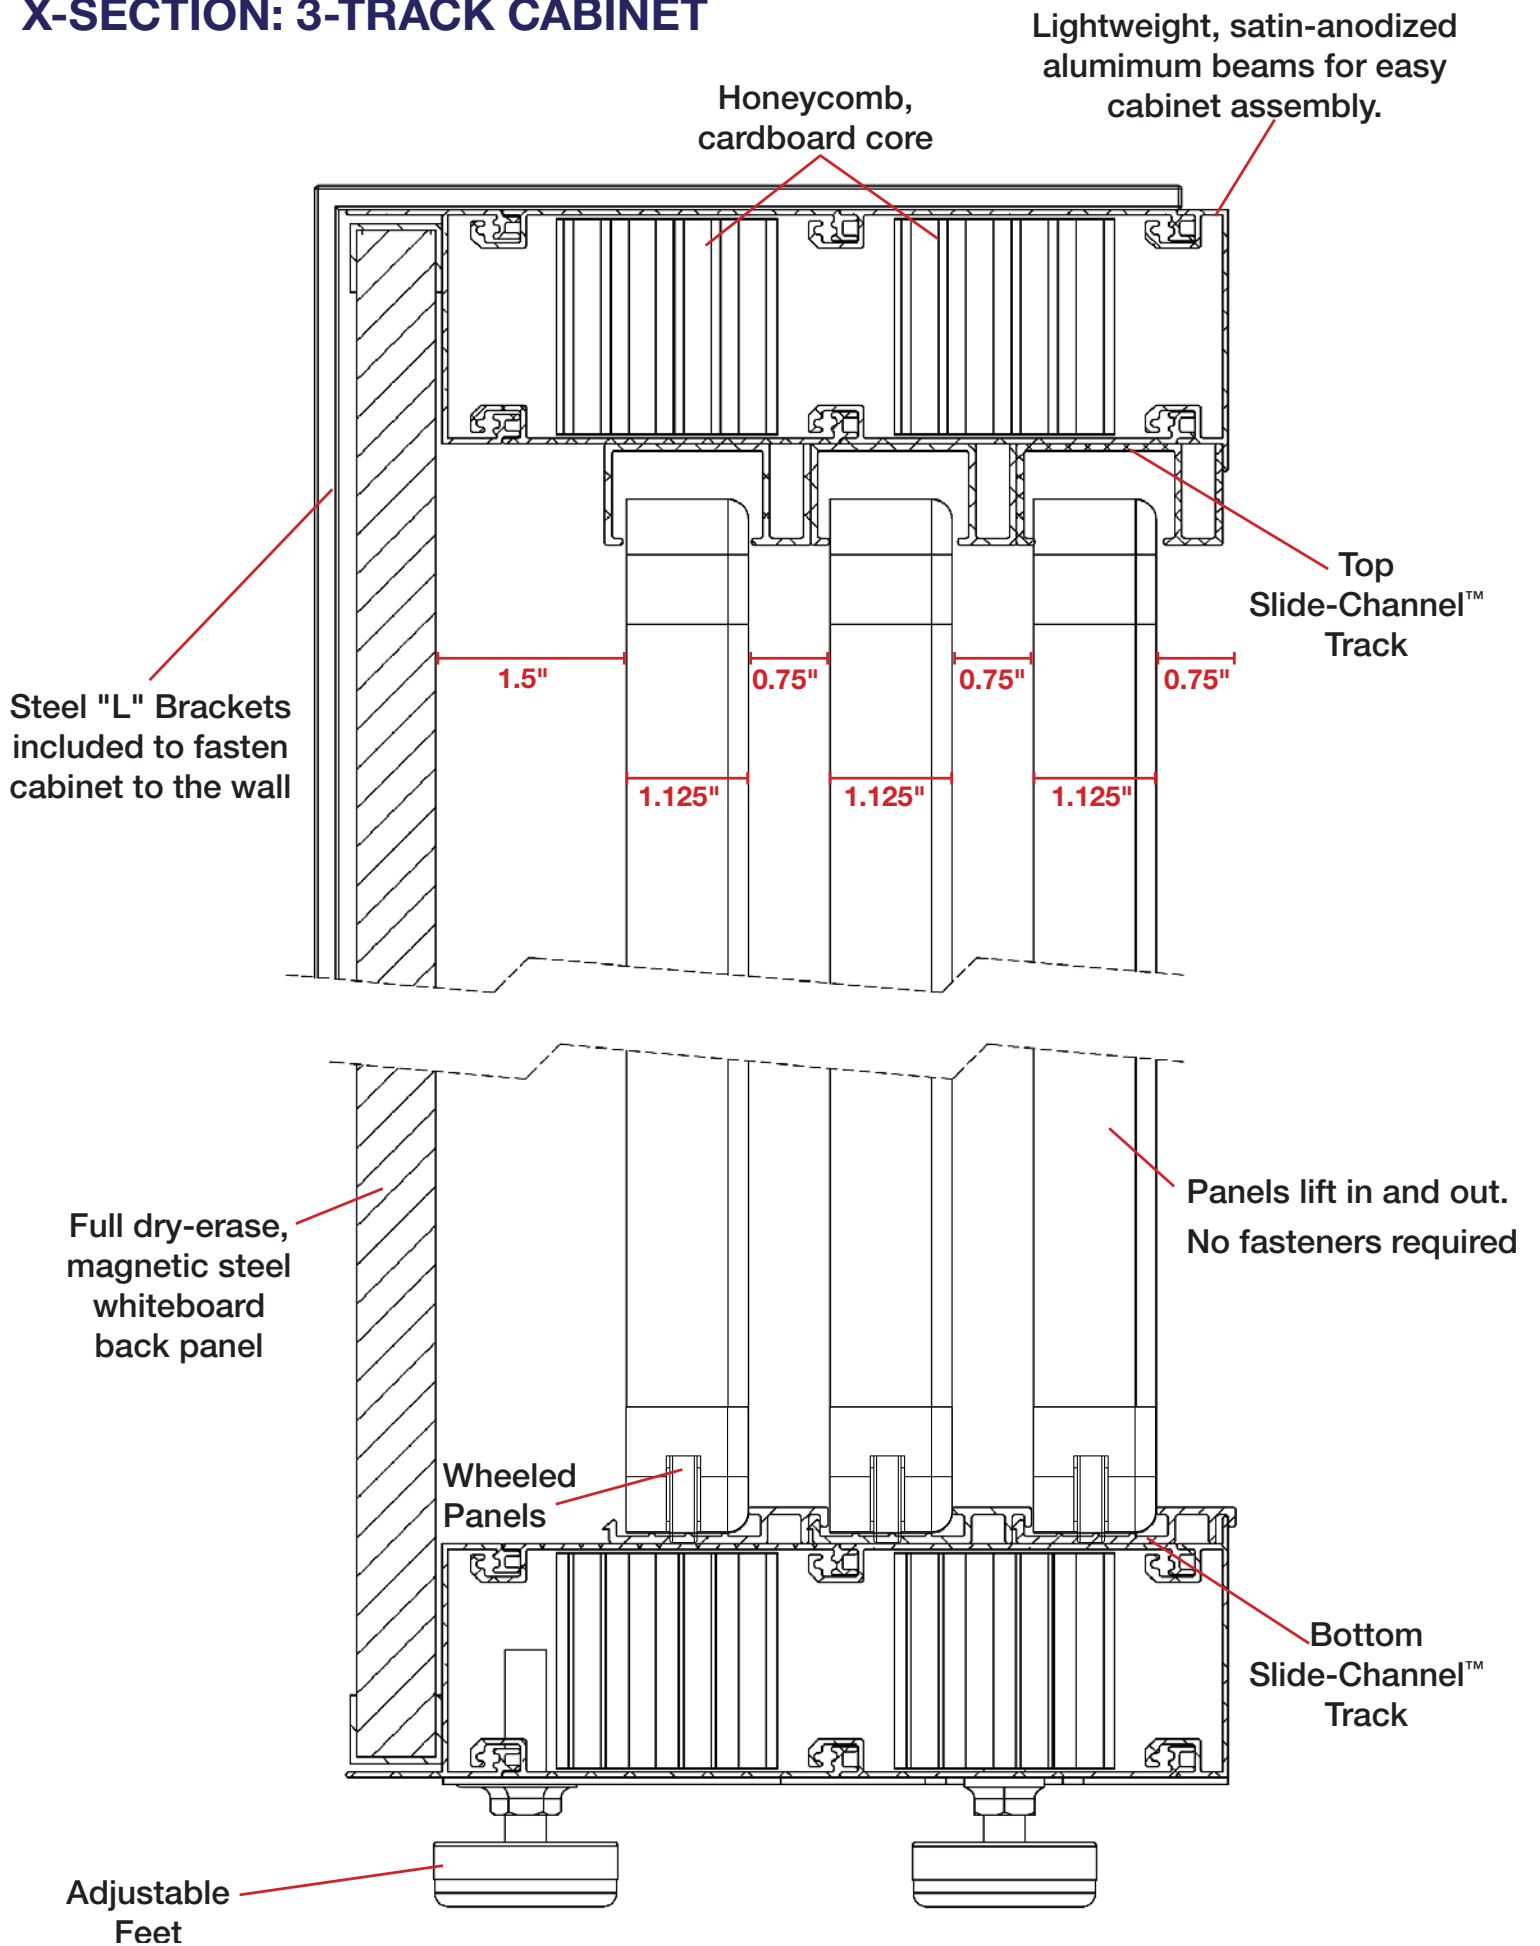

INSTALLATION INSTRUCTIONS (8 Easy-to-Follow Steps)

IMPORTANT: Assemble TrackWall® Cabinet face down on the floor near installation location.



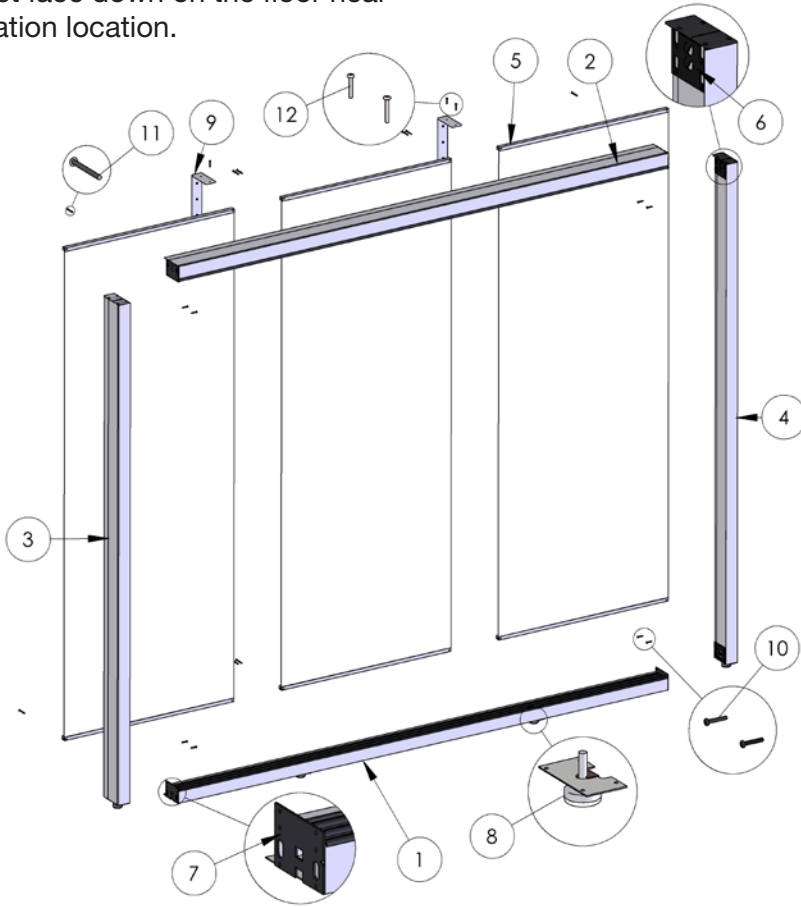


Diagram #	Part Description
1	Lower Crossmember
2	Upper Crossmember
3	Left Upright
4	Right Upright
5	Back Panels
6	Upright Endplate
7	Crossmember Endplate
8	Adjustable Feet
9	Wall Mounts / "L" Brackets
10	#8- 1" Black Panhead Screw
11	#8- 1 3/4" Silver Panhead Screw
12	#8- 1" Silver Panhead Screw

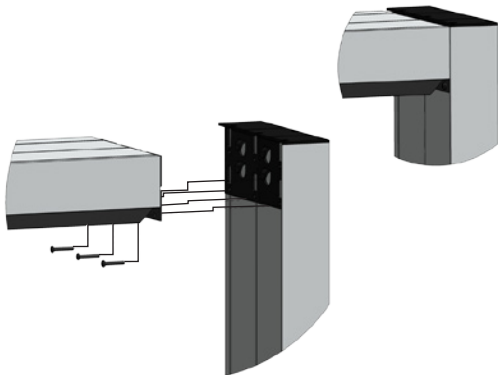

STEP 1

- Attach upper crossmember* (2) to the uprights (3, 4) by sliding the upright endplates (6) over the crossmember endplates (7) as shown in figure. Repeat process for lower crossmember (1).
- *Note: The upper crossmember has the deeper black SlidePanel™ tracks.



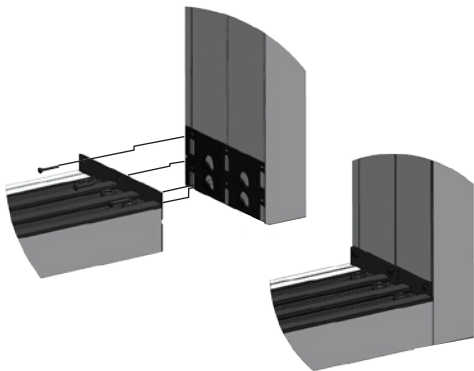


STEP 2

- After squaring the assembled cabinet frame with a framing square, fasten the #8 1" black panhead screws (10) through the crossmember endplates (7) and into the upright endplates (6) for all four corners of the cabinet frame.

STEP 3

- Install the cabinet Back Panels (5). Locate the letters on the back of the back panels and match with the letters on the assembled cabinet frame. Install back panels with whiteboard side down (toward front of cabinet). Fasten the back panels with the #8 1-3/4" silver panhead screws (11) into the pre-drilled holes on the cabinet frame.

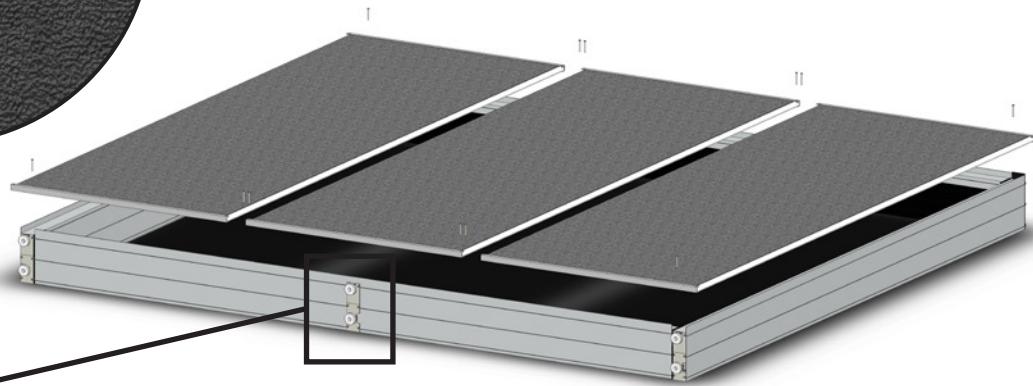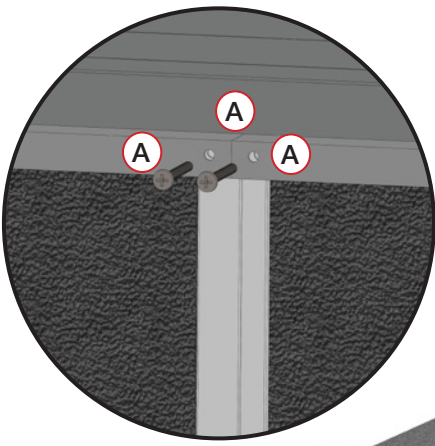

STEP 4

- Insert Adjustable Feet (8) into the brackets at the bottom of the uprights and bottom crossmember. Turn all the way in before standing the unit up and then adjust as needed to level to your floor.

STEP 5

- With the help of one or more people as needed, lift the assembled cabinet and position against desired wall location. Level the unit to the floor by turning the adjustable feet (8) as needed. Once leveled, place wall mount "L" brackets (9) over the upper crossmember (2) and slide down behind the cabinet (Fig. 4a).
- Position the L brackets at wall studs (if possible) and mark the locations of the brackets on the wall*. Also mark the drill hole locations through the L Bracket on crossmember (Fig. 4b), see note* below for high ceiling clearance installations.
- *Note: Be sure that the upper crossmember is level along the entire length of the cabinet when you mark your wall locations for the L brackets.



Setting & Marking Wall Mount Brackets

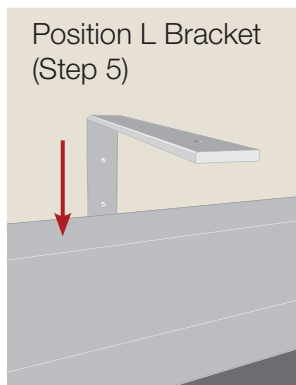


Fig. 4a

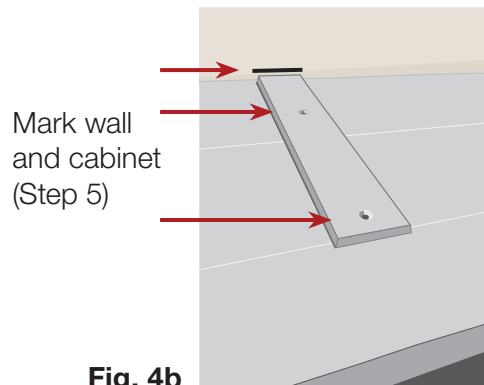


Fig. 4b

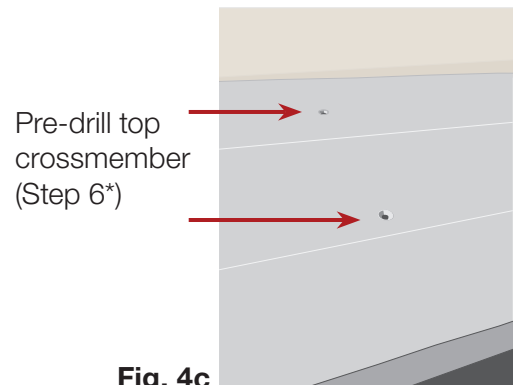


Fig. 4c

***NOTE:** If ceiling clearance allows, you can drill and fasten the L brackets into the top crossmember in step 7, no pre-drilling necessary.

STEP 6

- After wall and top crossmember (2) are marked, carefully remove the cabinet from the wall and set aside. Fasten the wall brackets (8) to the wall at marked locations using hardware appropriate for your wall type (not included). Be sure they are level.
- Next, pre-drill marked L bracket screw hole locations on top crossmember
- (Fig. 4c). For installations with minimal ceiling clearance, it may be necessary to lay the cabinet back down on the floor to enable pre-drilling of the top crossmember.


STEP 7

- Place the unit back into position on the wall, sliding carefully under the installed L brackets. Be sure that the pre-drilled holes in the top crossmember line up with the screw holes in the L bracket. Using a Phillips Screwdriver (low profile or stubby type, depending on ceiling clearance), fasten the cabinet to the L brackets using the #8 1" silver panhead screws provided (12).
- If ceiling clearance allows, you can pre-drill and fasten the L brackets to the cabinet during this step.

STEP 8

- Load your sliding TrackWall® panels into the cabinet by inserting the top edge of the panel into the desired upper track at similar angle shown left. Pivot the panel into the cabinet so that the bottom edge of the panel is above the corresponding bottom track and let the panel seat downward into the bottom track. The panel should slide easily in the cabinet left to right. Repeat for all other panels.

Your TrackWall® Cabinet is now ready for use.

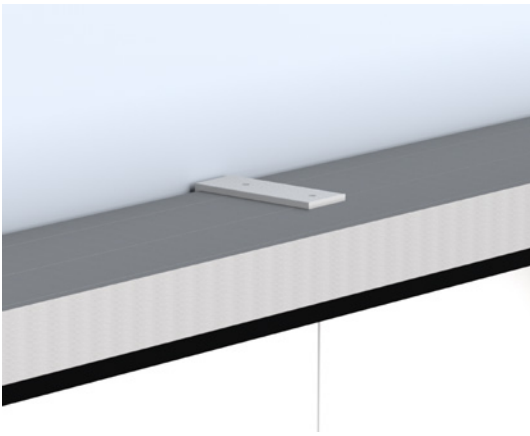

INSTALLATION


Safety Hooks

- Bail hangers are fastened on the back of the whiteboard every 16 inches to correspond to standard frame construction. Fasten Safety Hooks to wall studs at the desired height and loop bail hangers over hooks to mount your whiteboard.



FrameKlamps™

- This option allows fine tuning your whiteboard location left to right when wall studs are not in an ideal location for board mounting. Once your board is in the desired location simply rotate the lever on the FrameKlamps™ to lock your whiteboard in position.
- FrameKlamps™ fasten top and bottom of board tightly to the wall and can be mounted horizontally or vertically.

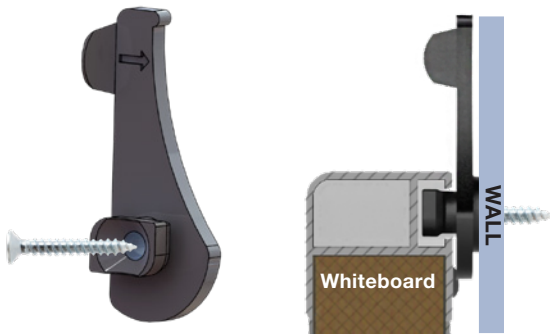


ADDITIONAL OPTIONS

PrivateEye™ Privacy Screen & Mounting Clips

- Keeps sensitive information out of plain sight
- Covers boards up to 8' wide and 4' high

FileView® Wall Organizer Accessory


- Easily access important files with this 16 pocket (or 11 pocket for 3' boards) organizer
- Built into the BoldLyne® Frame
- Compatible with 3' and 4' tall boards
- 12" wide
- Matches BoldLyne® frame color

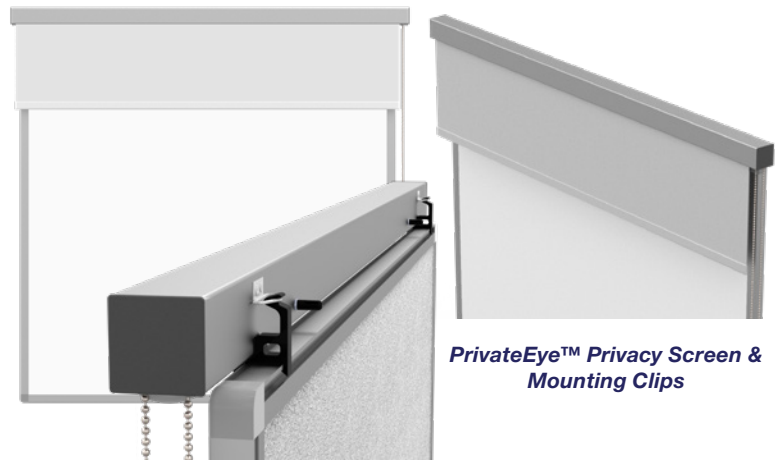

PrivateEye™ Privacy Screen & Mounting Clips

Aluminum Accessory Tray

- Available in silver or black
- 5 lengths (2', 3', 4', 6', 8' wide)
- 1-1/4" tray depth
- Smooth contoured edge caps, no sharp edges
- Factory-installed (can be field added)

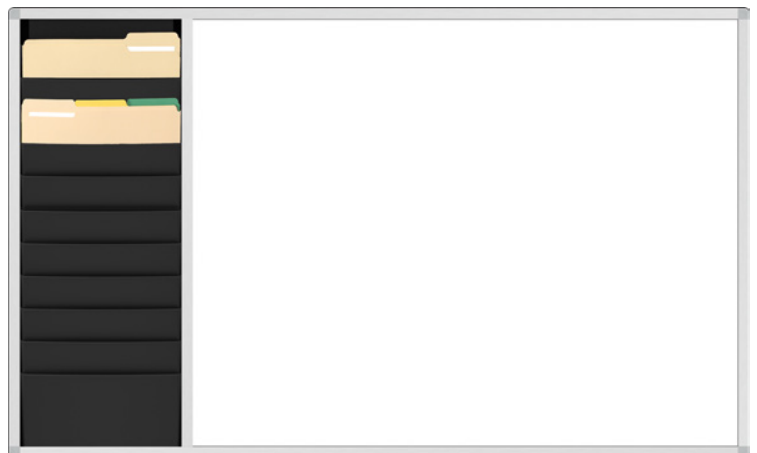

FileView® Wall Organizer Accessory



Aluminum Accessory Tray

BOARD SPECIFICATIONS




Listed Board Size (h x w)	Actual Board Size (h x w)	Working Area (h x w)	Weight (lbs.)
18" x 24"	19-1/2" x 25-1/2"	17" x 23"	5
24" x 18"	25-1/2" x 19-1/2"	23" x 17"	5
36" x 18"	37-1/2" x 19-1/2"	35" x 17"	8
2' x 3'	25-1/2" x 37-1/2"	23" x 35"	11
3' x 2'	37-1/2" x 25-1/2"	35" x 23"	11
2' x 4'	25-1/2" x 49-1/2"	23" x 47"	13
4' x 2'	49-1/2" x 25-1/2"	47" x 23"	13
3' x 3'	37-1/2" x 37-1/2"	35" x 35"	15
3' x 4'	37-1/2" x 49-1/2"	35" x 47"	19
4' x 3'	49-1/2" x 37-1/2"	47" x 35"	19
3' x 5'	37-1/2" x 61-1/2"	35" x 59"	22
4' x 4'	49-1/2" x 49-1/2"	47" x 47"	24
4' x 5'	49-1/2" x 61-1/2"	47" x 59"	32
5' x 4'	61-1/2" x 49-1/2"	59" x 47"	32
4' x 6'	49-1/2" x 73-1/2"	47" x 71"	37
6' x 4'	73-1/2" x 49-1/2"	71" x 47"	37
4' x 7'	49-1/2" x 85-1/2"	47" x 83"	43
4' x 8'	49-1/2" x 97-1/2"	47" x 93"	48
4' x 9'	49-1/2" x 109-1/2"	47" x 107"	53
4' x 10'	49-1/2" x 121-1/2"	47" x 119"	59
4' x 12'	49-1/2" x 145-1/2"	47" x 143"	71

BOLDLYNE® X-SECTION



Frame Styles (Silver, Black, Cherry)

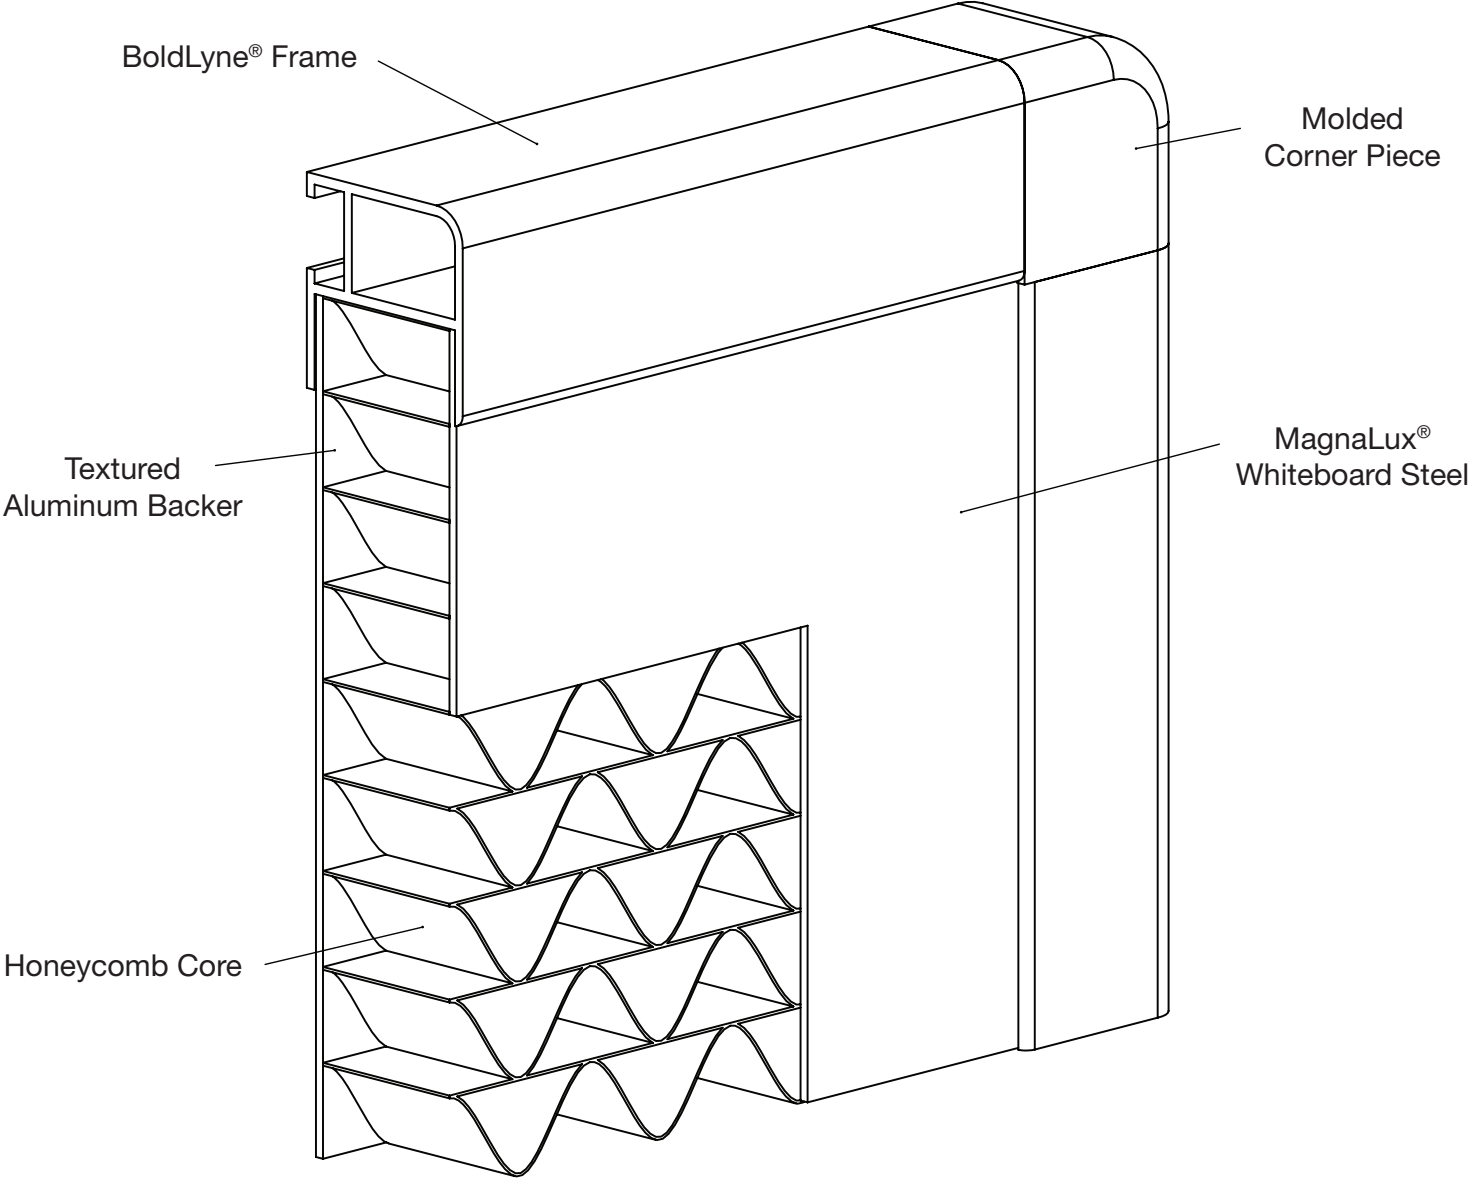



Roll-Around™ Magnetic Whiteboard Stands

1. Features

- Magnalux® Porcelain-Like Steel Markerboards
- Rolls around easily, does not pivot
- Includes 4 locking casters and aluminum marker tray
- All Roll-Around™ Stands are 76" tall
- The stand feet are 24" long x 2" wide. Stand foot height from the floor is 7" (at leg) and 3-1/2" (at wheels)
- Complete details, including BIM files, spec sheets, and more at magnatag.com/ZV


2. Options

- Available dual or single-sided, plain white or choose from over 2700 printed panel options
- Order your whiteboard stand with an open base (pictured above) or with a fabric decor base panel (in any of our FabricTack® colors)
- Any BoldLyne® framed whiteboard up to 8' wide can be built on a steel Roll-Around™ Vertical Whiteboard Stand


3. Assembly

- Caster wheels require minor assembly (see diagram to the left)

FabricTack® Colors

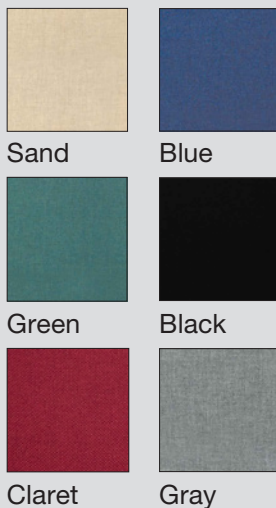

Magnatag® Roll-Around™ Stand
Foot Assembly Instructions

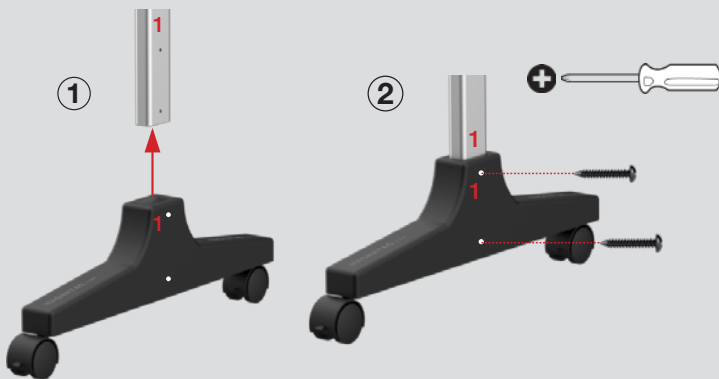

Roll-Around™ Horizontal Pivoting Whiteboard Stand

1. Features

- Magnalux® Porcelain-Like Steel Markerboards
- Order with plain or printed magnetic whiteboards
- Rotates and locks into the vertical position with a snap release
- Includes 4 locking casters
- All Horizontal PivotStands™ are 79" tall.
- The stand feet are 24" long x 2" wide. Stand foot height from the floor is 7" (at leg) and 3-1/2" (at wheels)
- Complete details at magnatag.com/ZH

2. Options

- Order your whiteboard stand with an open base or with a fabric decor base panel (in any of our FabricTack® colors)
- Available in 4 sizes: 3'x4', 4'x4', 4'x6', 4'x8' (hwxw)

3. Assembly

- Caster wheels require minor assembly (see diagram on the opposite page)



4-Leg Safety Easel for Whiteboards


1. Features

- Significantly lowers the risk of collapse when compared to traditional 3-leg whiteboard easels
- 4 legs that lock in place
- Heavy duty satin aluminum structure
- Designed for use with our magnetic whiteboards up to 4'x6' wide
- Larger boards can be supported with two easels
- Adjustable viewing height for smaller boards
- Folds for easy transport
- Complete details at magnatag.com/ESL



RotoCube® Rotating Magnetic Bulletin Towers

37 Standard Panel Options
Custom Print Option Available

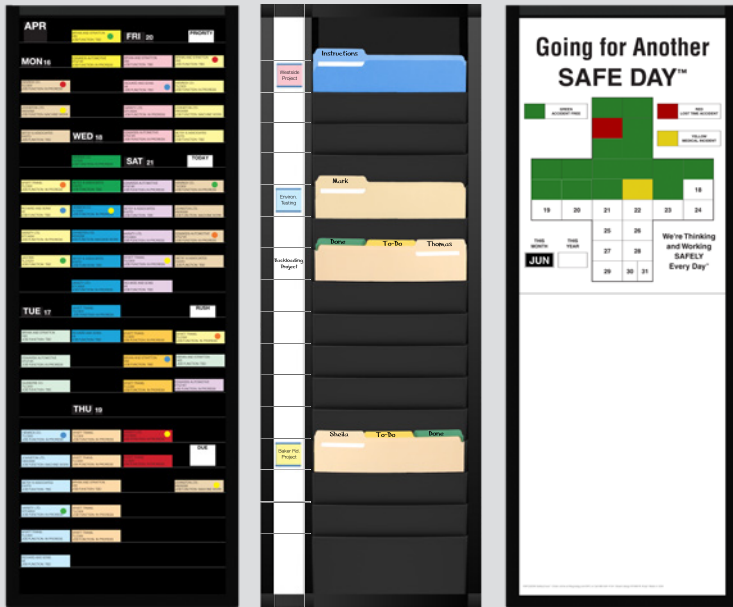

1. Features

- Magnalux® Porcelain-Like Steel Markerboards
- Free standing design with adjustable glide feet and optional floor anchors
- Condenses a 4' x 6' whiteboard into a 27" footprint
- 80" height for optimal viewing and writing
- Each individual side panel has 47"h x 17"w of usable space
- Complete details at rotocube.com

2. Options

- 37 standard panel options or custom print option
- Factory-installed Roll-Around™ wheels
- 3 Sizes Available: Original 4-sided RotoCube®, 5-sided RotoCube® or RotoCube® Big Island™

3. Benefits

- Removes barriers to critical lines of sight and displays information where everyone can see it
- Viewable from any angle without crowding
- Grab immediate attention and turn silently with a finger touch in either direction
- Displays information wherever people work, gather, or pass-by: on the production floor, lobbies, lunch rooms, hallways, reception areas, break rooms, and more



**Factory-Installed
Roll-Around™ Wheels**



**Adjustable Glide Feet with
Optional Floor Anchors**


ADDITIONAL FEATURES

Optimal height for viewing and writing.

80"




RotoCube® Towers grab immediate attention and turn silently with a finger touch in either direction.

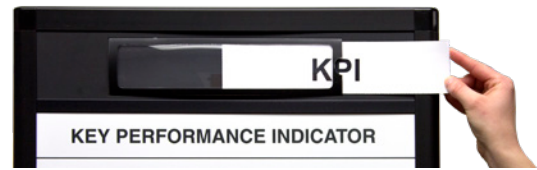


MARQUEE WINDOWS

Create your own headings. LetterEasy™ Card Keying Template with white marquee inserts included.



MAGNALUX® STEEL

Boards are a solid construction of steel/cell/backer to withstand a lifetime of daily use.



SAFETY IN MIND




Rounded corners and edges for safety.

Weighted base for stability.

Original 4-Sided RotoCube®

5-Sided RotoCube®

RotoCube® Big Island™

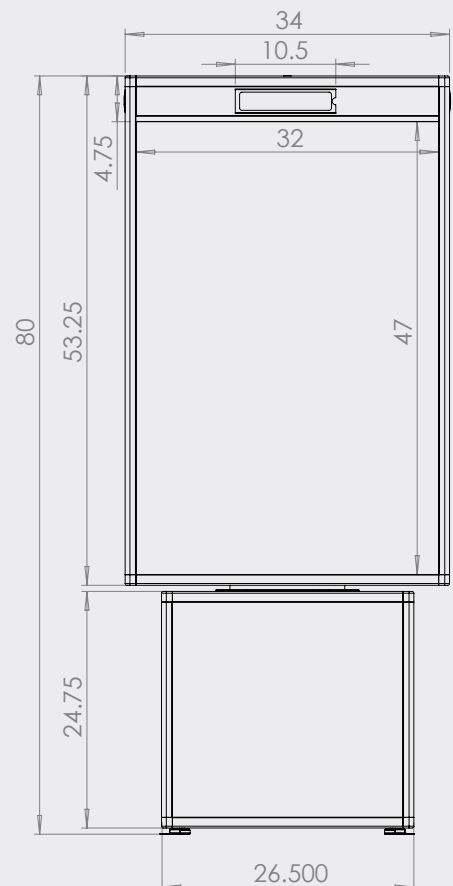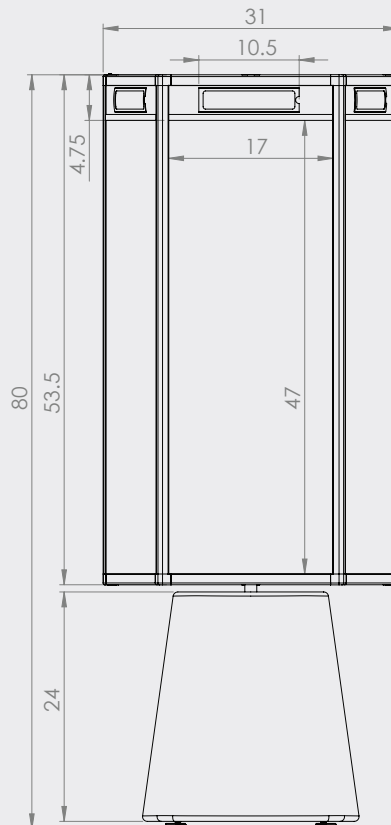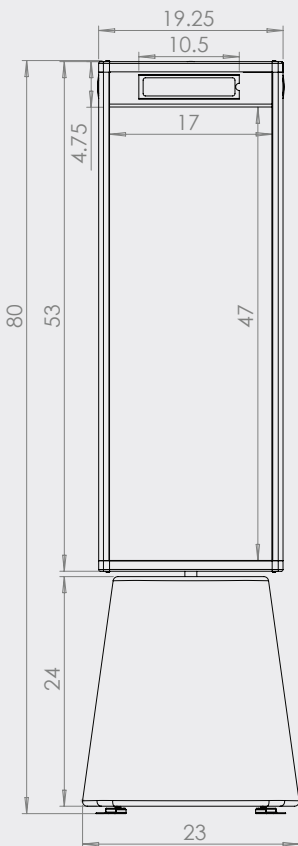



Magnatag[®]
Show What's Happening

PRODUCT CATALOG

Magnatag[®] Inc.
2031 O'Neil Rd
Macedon, NY 14502

Toll Free: (800) 624 4154
Email: sales@magnatag.com
Web: www.magnatag.com



Manufactured in
Macedon, NY

How do you show
what's happening?

