

# PlanView® Sliding Panel Visual Control Center **Assembly Instructions**



#### **Tools Needed**

- Level
- Framing Square
- Drill
- Phillips Screwdriver

Cabinet Components & Hardware			
2	Crossmembers, upper and lower		
2	Uprights, left and right (with attached adjustable feet)		
	Whiteboard Back Panels		
	Sub-Legs (with attached adjustable feet)		
	Fabric Kick Panels		
	Wall Mount ("L") Brackets		
	#8 - 1" Black Pan Head Screws		
	#8 - 1-3/4" Silver Pan Head Screws		

#8 - 1/2" Silver Pan Head Screws

#8 - 1" Silver Pan Head Screws

# **Assembled Cabinet Dimensions**

Sliding Panels				
Plain White	CorkTack™			
1-1/4" Rows	FabricTack®			
1" ShadeLine® Rows	Calendar			
MapMount® System	Isometric Grid			
1" Square Grid	Other:			
1" Square Ghost-Grid	тм			



2031 O'Neill Road Macedon, NY 14502-8953 USA E-mail: info@magnatag.com Web: magnatag.com/twa Phone: 800 624 4154 Fax: 315 986 4000

# PlanView® Assembly Instructions - Appendix A

For PlanView® Cabinets Greater than 24' in length

Read & Complete These Steps First

Tools Needed: Phillips head screwdriver

Fasteners Provided: 1" silver pan head screws, 1/2" black flat head screws

PlanView® Cabinet Crossmembers (upper and lower) for cabinets over 24 feet in width are shipped in two pieces due to the overall width of the cabinet.

1. Locate the half of each crossmember section which has the exposed paper-backed adhesive. Remove the paper backing (Figure 1) before sliding the halves together as described in step 2 below.



2. Assemble each Crossmember by aligning the Aluminum rails (2a) and sliding the two sections together (2b). The Adjoining parts are numbered to help ensure proper assembly (2c).

Have someone hold the extended track pieces away from the exposed adhesive as you slide the sections together (2d).

Note: The upper crossmember sections are the ones with the deeper black slide tracks.




#### **Outside Face of Crossmembers**

3. When fully engaged, the steel plate attached to one crossmember section will align over the predrilled holes (3a) of the other section.

Hi-lighted here in yellow.


Fasten the **1" Silver pan head screws** through the steel plate and into the pre-drilled holes (3b).

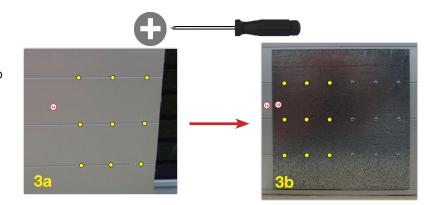

#### **Track Side of Crossmembers**

4. For both crossmembers, press the track firmly down onto the exposed adhesive from step 1.

For Top Crossmember Only: Using a Phillips Head Screwdriver, screw the **1/2**" black flat head screws into the pre-drilled holes for each track. HAND TIGHTEN ONLY.



5. Once both crossmembers have been assembled, proceed to the cabinet assembly instructions.

# **INSTALLATION INSTRUCTIONS** (10 Easy-to-Follow Steps)

IMPORTANT: Assemble PlanView® cabinet face down on the floor near installation

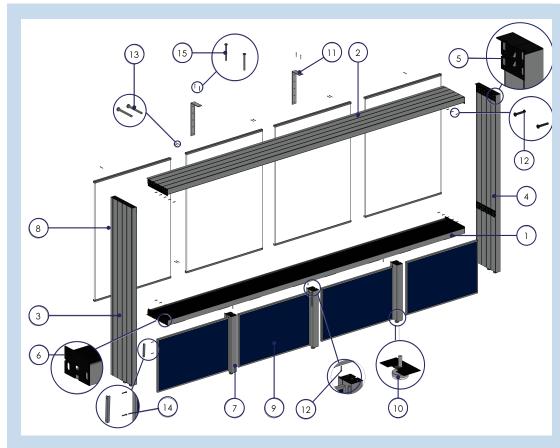


Diagram	Part Description			
1	Lower Crossmember			
2	Upper Crossmember			
3	Left Upright			
4	Right Upright			
5	Upright Endplate			
6	Crossmember Endplate			
7	Sub Leg(s)			
8	Back Panels			
9	Fabric Kick Panels			
10	Adjustable Feet			
11	Wall Mounts / "L" Brackets			
12	#8- 1" Black Panhead Screw			
13	#8- 13/4" Silver Panhea Screw			
14	#8- 1/2" Silver Panhead Screw			
15	#8- 1" Silver Panhead Screw			



#### STEP 1

<sup>°</sup> Attach upper crossmember\* (2) to the uprights (3, 4) by sliding the upright endplates (5) over the crossmember endplates (6) as shown in figure. Note: The upper crossmember has the deeper black SlidePanel™ tracks.

#### STEP 2


Attach lower crossmember (1) to the uprights (3, 4) by engaging the endplates as described above. Check each corner of the assembly with a framing square to ensure proper alignment.


## STEP 3

Once squared, fasten the #8 1" black panhead screws (12) through the crossmember endplates (6) and into the upright endplates (5) for all four corners of the cabinet frame.

# STEP 4

- <sup>o</sup> Attach the sub-legs (7) to the lower crossmember (1), engaging the endplates as with the cabinet frame. Match the number(s) on the sub-leg(s) with the corresponding number(s) on the crossmember.
- <sup>o</sup> Use the #8 1" black panhead screws (12) to fasten the endplate brackets on the sub-legs.

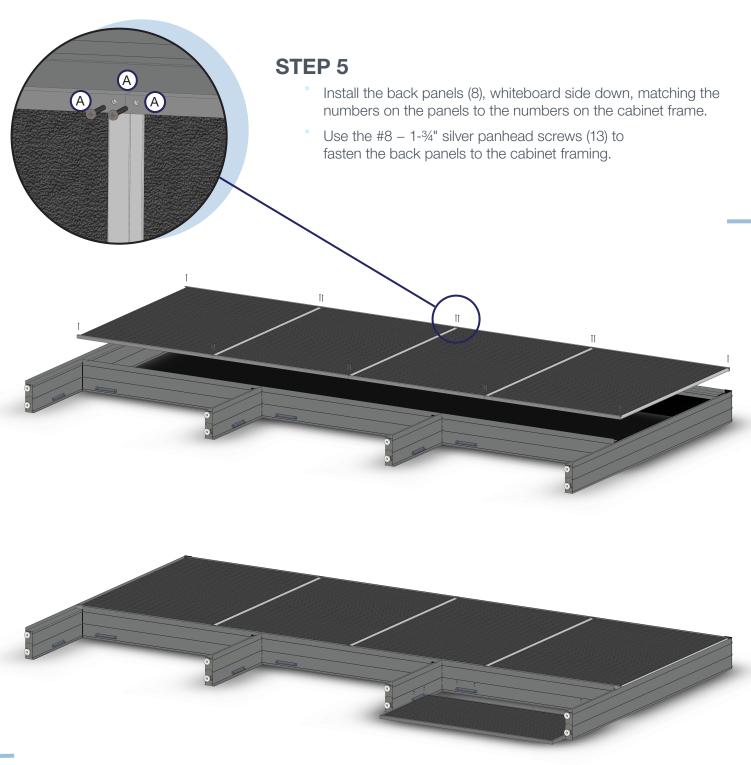



# STEP 6

- Slide the Fabric Kick Panels (9) into place, fabric side down, matching the numbers on the kick panels to the numbers on the sub-legs.
- $^{\circ}$  Use the #8  $\frac{1}{2}$ " silver panhead screws (14) to fasten

#### STEP 7

- With the help of others, lift the assembled PlanView® and place in position against the wall. Level it by adjusting the feet (10) at the bottom of the cabinet.
- Slide the wall mount "L" brackets (11) over and behind the upper crossmember (2) between the cabinet and the wall. Space the brackets at wall stud locations if possible. Mark the spacing and height of the wall brackets. 32 inch spacing is recommended.
- BE SURE THAT THE UPPER CROSSMEMBER IS LEVEL ALONG THE ENTIRE LENGTH OF THE CABINET BEFORE MARKING BRACKET LOCATIONS. This will ensure smooth panel sliding.

#### STEP 8

With the help of others, carefully move the PlanView® cabinet aside to fast the wall "L" brackets (11). Fasten the brackets to the wall using hardware (not included) appropriate for your wall type and into wall stude if possible.

### STEP 9

With the help of others, re-position the PlanView® cabinet under the installed wall mount "L" brackets. Drill holes through the bracket holes into the upper crossmember (2) and fasten using the #8 - 1" Silver Panhead Screws (15).

#### **STEP 10**

Load your PlanView® SlidePanels™ into the cabinet by inserting the top edge of the panel into the desired upper track at similar angle shown left. Pivot the panel into the cabinet so that the bottom edge of the panel is above the corresponding bottom track and let the panel seat downward into the bottom track. The panel should slide easily in the cabinet left to right. Repeat for the other SlidePanels™.

The PlanView® Cabinet is now ready for use.



